

PRODUCT CATALOGUE





OWN LABORATORIES

WIDE RANGE OF ASSORTMENTS

POLISH PRODUCTS



#DIY





ADHESIVES

4-19

HOUSEHOLD ADHESIVES
WOOD AND FLOOR ADHESIVES
BLISTERS AND MONTAGE ADHESIVES

SOLVENTS 20-25

GENERAL USE
AND SPECIALIST USE SOLVENTS

Dragon Poland

is a producer of construction, automotive and household chemicals operating since 1972. Dragon specializes in diluents and adhesives, but the extensive range also includes: sealants, sealers, primers, products for painting and wood protection, household, automotive and technical chemicals, paints and varnishes. Dragon Poland is the first producer in Poland to introduce solvents based on biodegradable raw materials into its offer.

Distributors in Dragon Poland brands Cities where 850 Types of 375 **Dragon products** products are available Stores with Products in Dragon various capacities products

PRODUCTS FOR WOOD

44-51


STAINS
PRESERVERS
VARNISHES
FILLERS


PAINTING,
PROTECTION
AND DECORATION


52-53

WOOD PRODUCTS MFTAL PRODUCTS







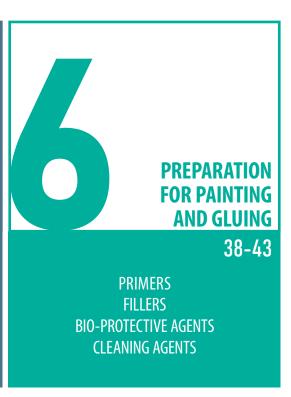



TECHNICAL PRODUCTS
PAINTING AND REPAIR
AUTOMOTIVE PRODUCTS



HOUSEHOLD CHEMICALS TECHNICAL CHEMISTRY AUTOMOTIVE CHEMISTRY SEASONAL ARTICLES 64-65

> ROAD SALT WINDSHIELD WASHERS DEFROSTER



66-69

SOLVENTS
PUTTIES
PROTECTIVE PRODUCTS

CONTACT ADHESIVE

SHOE ADHESIVE

contact

RUBBER ADHESIVE

contact





YELLOW

High-strength, multipurpose adhesive that bonds on contact with no need for clamping or support. It has the power to bond most types of materials, making it ideal for a wide range of DIY tasks and household repairs.

USE:

ADHESIVES

The product is intended for cold gluing: rubber leather (belt, handbag, saddle) fabrics wood cork

It can be used to glue footwear.

Efficiency: strongly depends on the type of substrate.

PRODUCT FEATURES:



waterproof



flexible



aging resistant



Product code: DKB	50 ml	200 ml	500 ml	750 ml	5 L	
nr of pieces in a pack	25	6	12	8	1	
nr of items on a layer	1000	252	120	56	24	
nr of nieces on a nallet	5000	1512	600	560	72	





TRANSPARENT

Professional, super-strong adhesive for cold bonding leather, rubber and various types of plastics, without the need for thermal activation. It has a high resistance to compression and bending.

USE:

The product is intended for gluing: natural and artificial leather | rubber | PVC | polyurethane

It can be used both in the footwear industry as well as in shoemaking workshops and households.

Efficiency: strongly depends on the type of substrate.

PRODUCT FEATURES:



waterproof



flexible



interior & exterior



pre-setting time

Product code: DKO	50 ml	750 ml - on request	
nr of pieces in a pack	25	8	
nr of items on a layer	1000	56	
nr of pieces on a pallet	5000	560	





YELLOW

Professional, easy-to use-glue, characterized by a very high adhesion to metal and rubber surfaces. Creates a strong & elastic joint resistant to weather conditions and temperature.

USE:

The product is intended for joining metal with: rubber | microgum

Perfect for repairing leaking hoses and rubber pipes as well as bicycle tubes.

Efficiency: 2-3 m²/L depending on the surface.

PRODUCT FEATURES:



waterproof



flexible



fast-setting



Product code: DKGM	50 ml	750 ml - on request
nr of pieces in a pack	25	8
nr of items on a layer	1000	56
nr of pieces on a pallet	5000	560

LEATHER ADHESIV

contact

PVC ADHESIVE

PLASTIC ADHESIVE

UNIVERSAL ADHESIVE



STRAW

Easy-to-use, reliable adhesive for cold bonding natural leather and rubber. The hardened joint is highly flexible, very durable and also resistant to aging and water.

APPLICATION:

The product is intended for gluing: cold, natural leather | rubber | felt

It can be used for gluing the veneers of table tennis rackets and footwear.

Efficiency: 2-3 m²/L.

PRODUCT FEATURES:



waterproof





& exterior









TRANSPARENT

Adhesive for gluing PVC elements. Creates a hard, waterproof joint. It does not contain toluene. After drying, it has the same structure as the glued materials. Fills small cavities.

APPLICATION:

The product is intended for gluing PVC products and: assembly and repair of installations, PVC cables | sealing **PVC** connections

Efficiency: 2-5 m²/L.

PRODUCT FEATURES:



waterproof





fast-setting



thermal resistant

roduct code: DKPCW	50 ml	750 ml - on request	
r of pieces in a pack	25	8	
r of items on a layer	1000	56	
r of pioces on a pallet	5000	ECO	



TRANSPARENT

Professional, super-strong adhesives for cold gluing various types of plastics, without the need for a hardener or thermal activation.

APPLICATION:

The product is intended for repair of: phone cases | computers | electric tools | household appliances other elements made of PMMA (plexiglass), ABS, PVC, non-foamed PS, etc.

Efficiency: 2-5 m²/L.

PRODUCT FEATURES:



waterproof



interior



Product code: DKPL

nr of pieces in a pack

drying



resistant







BEIGE

A polymer, paste-like, fast-setting adhesive. Very durable and flexible, it does not cause discoloration. It does not contain petroleum solvents.

APPLICATION:

The product is intended for gluing:

wood | wood-like materials | sponges | paper | cardboard | fabrics | felt | carpet flooring | natural and artificial stones ceramics | glazes | cork | metal for common mineral substrates

One of the surfaces to be glued must be porous.

Efficiency: 1-2 m²/L.

PRODUCT FEATURES:



moisture resistance



fllexible



petroleum solvents-free



thermal resistant

Product code: DKUG	50 ml	750 ml - on request	
nr of pieces in a pack	25	8	
nr of items on a layer	1000	56	
nr of pieces on a pallet	5000	560	

UNIVERSAL ADHESIVE

polymer

POLYSTYRENE ADHESIVE

HOBBY ADHESIVE



TRANSPARENT

A polymer, high-performance adhesive with a wide range of applications in finishing and repair tasks. Creates a waterproof, flexible joint. The resulting joint, after drying, is resistant to temperatures from -20°C to +60°C.

APPLICATION:

The product is intended for gluing:

polystyrene | glazes | ceramics | glass | wood with each other and in various combinations | wood-based materials carpet flooring artificial leather for concrete, cement-lime, gypsum, plaster and brick substrates

One of the surfaces to be glued must be porous.

Efficiency: 4-6 m²/L.

PRODUCT FEATURES:



waterproof



interior & exterior



pre-drying







TRANSPARENT

Modern, easy-to-use, guick-drying adhesive. Creates a transparent, waterproof and flexible joint. Designed for sticking elements inside rooms, made of polystyrene.

APPLICATION:

polymer

The product is intended for joining: polystyrene elements made of polystyrene: ceiling coffers decorative strips | decorative panels | sponge | polyurethane foam

Efficiency: 4-6 m²/L.

PRODUCT FEATURES:



waterproof



interior & exterior



drying



roduct code: DKSG	200 ml	500 ml	750 ml	3 L- on request	
r of pieces in a pack	10	10	10	1	
r of items on a layer	240	100	100	24	
r of items on a nallet	1920	600	400	120	



TRANSPARENT AFTER DRYING

The adhesive is intended for all works and creative games, such as scrapbooking, hand-made cards and for gluing book spines. It perfectly combines both flexible and hard surfaces. It does not contain organic solvents.

APPLICATION:

The product is intended for gluing:

paper | cardboard box | card stock | fabrics | cork | puzzle pieces for decoupage on wood models of wood and paper

It is suitable for bonding paper and cardboard with various films, e.g. polyvinyl chloride, polyurethane and polystyrene.

Efficiency: 3-10 m²/L.

PRODUCT FEATURES:



organic solvents-free





interior



Product code: DKP	50 ml
nr of pieces in a pack	25
nr of items on a layer	1000
	5000

MULTI PURPOSE SPRAY GLUE

universal contact adhesive



TRANSPARENT

All-purpose, strong contact adhesive in aerosol form. Equipped with a valve for simple and convenient application of the adhesive. It is characterized by high initial adhesion and low absorption. It can be used for upholstery work and for gluing carpets. It is ideal for applications where the application of conventional adhesives may be difficult.

APPLICATION:

The product is designed for bonding most materials used in the upholstery industry, such as fabrics | fibrous materials | jute | foam. It is also used to glue cardboard | cork | leather | rubber to each other and to materials made of wood, concrete, ceramics, etc.

PRODUCT FEATURES:



water-resistant



interior & exterior



highly flexible



easy application

Product code: DMSGUKK	400 ml
nr of pieces in a pack	6
nr of items on a layer	174
nr of items on a pallet	1044

HIGH TACK SPRAY GLUE

mounting contact adhesive



TRANSPARENT

Professional, fast-setting aerosol mounting adhesive with a strong initial grip. Intended for repair, assembly and upholstery work in crafts, modelling and households. Bonded surfaces adhere with exceptional speed and high bonding strength. Creates a durable, flexible and waterproof joint.

APPLICATION:

The product is intended for gluing materials made of concrete metals ceramics bricks stone wood foam upholstery. It is also used to glue cardboard cork leather rubber to each other and to materials made of wood, concrete, ceramics, etc.

PRODUCT FEATURES:



water-resistant



interior & exterior



evaporates quickly



easy application

Product code: DHTSGMKK	400 ml	
nr of pieces in a pack	6	
nr of items on a layer	174	
nr of items on a pallet	1044	

PARQUET ADHESIVE

synthetic



DARK BEIGE

Professional, free from aromatic solvents, water-free and fast-setting adhesive. Creates a flexible joint. It is characterized by good stability and high mechanical strength. It does not cause discoloration and "swelling" of glued wood.

APPLICATION:

The product is intended for gluing:

parquet floor | mix parquet | mosaic parquet | industrial parquet made of traditional and exotic wood | three-layer board | floors sensitive to absorption of moisture

Efficiency up to: 0,5-0,8 m²/kg.

PRODUCT FEATURES:



very durable



interior



discoloration



waterproof

Product code: DKPS	1 kg	5 kg	15 kg	25 kg	
nr of pieces in a pack	8	1	1	1	
nr of items on a layer	56	33	11	11	
nr of items on a nallet	560	165	33	33	

PRIMER PARQUET ADHESIVE



TRANSPARENT

The primer creates a colorless, flexible layer that strengthens the absorbency of the substrate and strengthens the substrate to the depth of penetration. For indoor use.

APPLICATION:

Product intended for grounding:

porous and absorbent surfaces before using DRAGON "Parquet Adhesive" to increase the cohesion of the substrate

SOLVENT PAROUET ADHESIVE

SOLVENT PARQUET

ADHESIVE



TRANSPARENT

A very effective product, best used with "Parquet System" set, which consists of Parquet Adhesive - Synthetic and Parquet Adhesive Primer.

APPLICATION:

The product is intended for:

cleaning dirty tools removal of residual adhesives and lubricants

Efficiency: $< 6 \text{ m}^2/\text{L}$.

PRODUCT FEATURES:



efficient



odourless



colorless



drying time

 Product code: DGKPS
 2,5 L

 nr of pieces in a pack
 4

 nr of terms on a layer
 24

 nr of terms on a pallet
 216

PRODUCT FEATURES:



efficient



cleans perfectly



colorless



odourless

Product code: DRKPS	500 ml ME
nr of pieces in a pack	20
nr of items on a layer	120
nr of items on a pallet	960

7

CARPET ADHESIVE

WOOD ADHESIVE







BEIGE

A ready-to-use product with proven effectiveness. It does not contain organic solvents that could damage the floor covering. Creates durable, flexible joints.

APPLICATION:

Product intended for bonding textile floor coverings to: cement substrate | plasterboard | cementlime | fibreboards, chipboards and other common substrates in construction

It can also be used for gluing plastic floor tiles.

Efficiency: strongly depends on the type of substrate.

PRODUCT FEATURES:








organic solvents-free



thermal resistant





TRANSPARENT AFTER DRYING

A professional product for cold gluing of wood. Creates a colorless, durable, moisture-resistant (class D2), flexible joint. It does not contain organic solvents.

APPLICATION:

Product intended for gluing:

wood | chipboard | plywood | blockboards | other wood--like materials with each other and with selected plastics and fabrics

It can be used for gluing paper.

Efficiency: 4-10 m²/L.

PRODUCT FEATURES:



organic solvents-free





pre-setting



WOOD ADHESIVE

fast curing



TRANSPARENT AFTER DRYING

The product is waterproof in class D3. For indoor use in places exposed to short-term action of water and characterized by high humidity, and outside in places not exposed to direct and long-term contact with water.

APPLICATION:

Product intended for cold and hot gluing: wood | blockboards | chipboard | plywood | wood-based materials

Perfect for gluing kitchen and bathroom countertops.

Efficiency: 5-11 m²/L.

PRODUCT FEATURES:



organic solvents-free



interior & exterior



pre-setting



Product code: DKDD3	200 ml	500 ml	750 ml
nr of pieces in a pack	10	10	10
nr of items on a layer	240	100	100
nr of items on a nallet	1920	600	400

WOOD ADHESIVE D3

Strongly binding

For gluing: wood, blockboards, chipboards, plywood



VICAR	FAST CURING	ULTRA-WATERPROOF
D2	D3	D4
interior	interior/ exterior	interior/ exterior
wooden furniture handrails and stairs decorative elements wooden models	kitchen and bathroom furniture railings interior windows and doors wood joints	exterior windows and doors garden architecture elements of boats and yachts construction wooden house facade
25 minutes	15 minutes	25 minutes
24 h	24 h	24 h
white	white	amber
transparent	transparent	beige
PVA-based	PVA-based	polyurethane
blister, tube, PET bottle, HDPE container, HDPE bucket	blister, PET bottle	blister
20 ml, 50 ml, 200 ml, 500 ml, 750 ml, 3 kg, 5 kg, 10 kg	40 ml, 200 ml, 500 ml, 750 ml	40 ml
	interior wooden furniture handrails and stairs decorative elements wooden models 25 minutes 24 h white transparent PVA-based blister, tube, PET bottle, HDPE container, HDPE bucket 20 ml, 50 ml, 200 ml, 500 ml,	interior interior/ exterior wooden furniture handrails and stairs decorative elements wooden models interior windows and doors wood joints 25 minutes 15 minutes 24 h 24 h white transparent transparent PVA-based PVA-based blister, tube, PET bottle, HDPE container, HDPE bucket 20 ml, 50 ml, 200 ml, 500 ml, 750 ml, 750 ml









GLASS

PLASTIC

CERAMICS

LEATHER

ULTRA FAST GLUE

cyanoacrylate





TRANSPARENT

Cyanoacrylate adhesive for universal use. Available as both a metal tube and a plastic bottle with an applicator, providing super easy, clean and controlled dispensing of the glue.

APPLICATION:

Product is intended for minor repairs, for immediate bonding of: ceramics | plastic | wood | rubber | leather | metal





interior & exterior





Product code: DKC	2 g	6 ml
nr of pieces in a pack	24	12
nr of items on a layer	2304	360
or of items on a pallet	11520	2520

CONTACT POWER GLUE

ALE



MILKY AFTER DRYING

Universal glue in the form of a gel. Thanks to its consistency, it is easy to apply, does not run off and can be used even on vertical surfaces. Creates a flexible joint.

APPLICATION:

Product intended for gluing: rubber | natural leather | artificial leather | textiles | felt | ceramics | glass | wood | cork

A necessary product in every household.

PRODUCT FEATURES:



waterproof



interior





Product code: DKKP nr of pieces in a pack

CLEAR POWER GLUE

polymer





TRANSPARENT

A polymer, high-performance adhesive with a wide range of applications. Creates a waterproof, flexible joint.

APPLICATION:

Product intended for gluing: polystyrene | glazes | ceramics | glass | wood with each other and in various combinations | woodbased materials | carpet flooring artificial leather

At least one of the surfaces to be glued must be porous.

PRODUCT FEATURES:



waterproof



interior & exterior



many uses



flexible

20 ml
12
360
2520





METAL







moisture resistant

PRODUCT FEATURES:



for minor repairs

POWER GLUE

epoxide





TRANSPARENT AFTER DRYING

Two-component epoxy adhesive of excellent quality with a universal spectrum of action. Resistant to water, oils, most chemicals and cleaning agents.

APPLICATION:

Product intended for gluing: metal | ceramics | porcelain | rock minerals | concrete elements | polystyrene | plastics e.g. laminates | polyester plastics, bakelites

Useful when repairing fixtures and sanitary equipment, repairing jewelry and decorations, attaching glass holders, gluing advertisements, inscriptions, etc.

PRODUCT FEATURES:



waterproof



interior & exterior



can be processed



pre-set time

2 x 15 ml Product code: DKEP nr of pieces in a pack

5 MINUTES GLUE

universal/epoxide

EASY TO USE





TRANSPARENT AFTER DRYING

Easy to use, very strong, two-component adhesive for bonding and filling. The obtained joint is strong, does not deform, does not shrink and does not stretch. After hardening, it can be sanded, sawed and drilled.

APPLICATION:

Product intended for gluing:

metal | ceramics | wood | porcelain | rock minerals | concrete elements | polystyrene | rubber | synthetic materials

Useful when repairing fixtures and sanitary equipment, repairing jewelry and decorations, attaching glass holders, gluing advertisements, inscriptions, blends, etc.

PRODUCT FEATURES:









permanent binding



can be machined

Product code: DKEUM	2x3 ml	2x12,5 ml
nr of pieces in a pack	12	12
nr of items on a layer	600	336
nr of items on a pallet	4800	2016

METAL GLUE

epoxide

EASY TO USE



GREY AFTER MIXING

Strong, two-component adhesive for joining metals. Useful for repairing cracks in metal bodies and for bonding metal to non-metal parts.

APPLICATION:

Product intended for gluing:

steel | iron | cast iron | aluminum | metal alloys | some plastics, etc.

Useful for embedding bearing journals, filling slight cavities in metal parts, etc.

PRODUCT FEATURES:





interior & exterior





machined

Product code: DKEM	2x12,5 ml
nr of pieces in a pack	12
nr of items on a layer	336
nr of items on a nallet	2016

WOOD GLUE

WOOD GLUE

fast curing



VINYL GLUE

polyurethane



TRANSPARENT AFTER DRYING

High-quality, moisture-resistant (EN 204 D2) white-wood glue for indoor use. Dries transparent. For bonding and laminating of practically all hard, soft and exotic types of wood.

APPLICATION:

Product intended for gluing:

wood | chipboard | plywood | blockboards | woodbased materials with each other and with selected plastics and fabrics

It can be used for gluing paper.



TRANSPARENT AFTER DRYING

High-quality, water-resistant (EN 204 D3) wood glue for indoor and outdoor use. Dries transparent. It provides a high strength, very resistant bond that is usually stronger than the wood itself.

APPLICATION:

Product intended for gluing:

wood | blockboards | chipboard | plywood | other woodbased materials

It can be used for gluing kitchen and bathroom countertops.



AMBER

One-component adhesive with D4 class water resistance. It is great for gluing even wet wood. It hardens by reacting with moisture in wood and air. Creates an elastic joint, resistant to temperatures ranging from -40° C to $+80^{\circ}$ C.

APPLICATION:

Product intended for gluing: all types of wood | chipboard | blockboards and etc.

For use in places exposed to direct contact with water, i.e. garden architecture.



TRANSPARENT

Polyurethane adhesive for bonding soft PVC and artificial leather. Creates a very strong, waterproof joint, resistant to temperatures in the range -20° C to $+80^{\circ}$ C.

APPLICATION:

Product intended for:

bonding soft PVC | artificial leather | repair of inflatable boats, mattresses, swimming pools, PVC umbrellas, tents, belts, shower curtains, etc.

PRODUCT FEATURES:



moisture resistant







pre-setting time

Product code: DKDR	20 ml	
nr of pieces in a pack	12	
nr of items on a layer	360	
nr of items on a pallet	2520	

PRODUCT FEATURES:



waterproof



interior & exterior



pre-setting time

Product code: DKDD3	40 ml
nr of pieces in a pack	12
nr of items on a layer	420
nr of items on a nallet	2940

PRODUCT FEATURES:



waterproof



interior & exterior



Product code: DKDD4 nr of pieces in a pack

nr of items on a palle

pre-setting time



thermal resistant

40 ml	
12	
420	
2940	

PRODUCT FEATURES:



flexible



interior & exterior



waterproof



thermal resistant

Product code: DKVI	20 ml
nr of pieces in a pack	12
nr of items on a layer	360
nr of items on a pallet	2520

PLASTIC GLUE

polymer

PVC GLUE

polymer

SHOE GLUE

polyurethane

LEATHER GLUE

contact



TRANSPARENT

Very durable glue with fast bonding, for different types of plastics. It is suitable for use with most plastic types, making it versatile and ideal for a variety of applications. Once dry, the results are water resistant and long lasting.

APPLICATION:

Product intended for repair:

phone cases | computers | electric tools | household appliances | bonding PVC pipes | gutters | other elements made of PMMA (plexiglass), ABS, PVC, non-foamed PS, etc.



TRANSPARENT

Fast-setting, super-durable, polymer adhesive for bonding PVC elements. Creates a hard, waterproof joint. After drying, the resulting joint is resistant to temperatures up to +70°C. It does not contain toluene.

APPLICATION:

Product intended for repair:

phone cases | computers | electric tools | household appliances | bonding PVC pipes | gutters | other elements made of PMMA (plexiglass), ABS, PVC, non-foamed PS, etc.



TRANSPARENT

Superior, no mess glue that easily and permanently repairs all types of footwear. Great for applications requiring high flexibility. It dries to a waterproof and flexible joint, so it will repair waders and boots without breaking or cracking.

APPLICATION:

product intended for cold gluing: natural leather | synthetic leather | rubber | polyurethane soles



STRAW

Professional glue, easy to use, very flexible, fast-acting, based on natural rubber and solvent. Provides a flexible and weatherproof bond. It is ideal for making long lasting and flexible repairs to leather or imitation leather items.

APPLICATION:

product intended for cold gluing: leather (e.g. belt, handbag, saddle) | rubber | felt

It can be used to glue footwear.

PRODUCT FEATURES:



waterproof



interior & exterior







Product code: DKPL	20 ml
nr of pieces in a pack	12
nr of items on a layer	360
nr of items on a pallet	2520

PRODUCT FEATURES:



fast curing



interior & exterior





thermal resistant

Product code: DKPCW nr of pieces in a pack 360 nr of items on a palle

PRODUCT FEATURES:



waterproof



flexibility





thermal resistant

Product code: DKO

PRODUCT FEATURES:



flexible



interior & exterior



waterproof



pre-setting time

Product code: DKSK nr of pieces in a pack

CONTACT GLUE

RUBBER / METAL GLUE

contact

HOBBY GLUE

for small household fix

RUBBER GLUE

contact



YELLOW

Easy-to-use, quick-setting, solvent-based contact adhesive. Creates very durable, flexible joints resistant to water.

APPLICATION:

Product is intended for cold gluing: rubber | leather (belt, handbag, saddle) | fabrics | wood | cork

It can be used to glue footwear.



YELLOW

Easy-to-use, quick-setting, solvent-based adhesive. It is characterized by very high adhesion to rubber and metal. It creates an exceptionally strong, durable, waterproof and flexible joint. It does not stain the connected elements.

APPLICATION:

Product is intended for joining metal with: rubber | with microgum

For use in car, shoemaker, tailor, household and construction workshops.



TRANSPARENT AFTER DRYING

Adhesive intended for any task and creative games such as scrapbooking, hand-made cards and for gluing book spines. Works perfectly on both flexible and hard surfaces. It does not contain organic solvents.

APPLICATION:

Product intended for gluing: paper | cardboard box | card stock | fabrics | cork | puzzle pieces for decoupage on wood

It is suitable for bonding paper and cardboard with various films, e.g. polyvinyl chloride, polyurethane and polystyrene.



YELLOW

Professional adhesive intended for joining rubber, leather, textiles, felt, ceramics, wood, cork, some plastics, etc. The resulting joint is resistant to temperatures ranging from -40°C to +70°C.

APPLICATION:

Product is intended for joining: rubber | leather | textiles | felt | ceramics | wood | cork | some plastics, etc.

PRODUCT FEATURES:



resistant to the aging process



& exterior



waterproof





PRODUCT FEATURES:



Product code: DKGM

nr of pieces in a pack

waterproof



interior & exterior

high

adhesion



12

360

PRODUCT FEATURES:



moisture resistant





Product code: DKH

nr of pieces in a pack

12

360





thermal resistant

waterproof

PRODUCT FEATURES:



flexible

interior

& exterior

Product code: DKG	20 ml
nr of pieces in a pack	12
nr of items on a layer	360
	2520

HEAT RESISTANT GLUE

silicate

STICKER REMOVER

ENAMEL FIX

EPOXY REPAIR STICK

remedial





GREY

Product intended for filling cracks, holes, repairing concrete surfaces, tanks, drums, sealing containers and repairing leaks. It is also used to attach hooks to walls.

WHITE

Enamel Fix able to repair and restore damaged baths, sanitaryware and kitchen appliances by making near invisible and permanent repairs to chips and scratches. This white enamel paint has been specially designed to give a

APPLICATION:

Product intended for:

filling cracks and holes repair of concrete surfaces repairs of tanks and drums | sealing containers | repairing leaks | attaching hooks to walls



GREY

A paste-like adhesive designed for materials operating at very high temperatures: up to + 1000°C. Resistant to dilute acids, water and exhaust fumes. It is characterized by high adhesion.

APPLICATION:

Product is intended for:

sealing and repairing exhaust systems in motor vehicles for repairing and sealing damaged brick, concrete, ceramic or metal pipes intended for the evacuation of flue gases and liquids

APPLICATION:

and sticker.

BRUSH IN A BOTTLE

Product intended for:

sticker removal tapes paper labels made of metal, glass, porcelain, wood, plastic, rubber and leather

Ideal for the quick, simple and clean removal of paper labels

and stickers. It completely neutralizes the glue without

leaving any traces or damaging the surface under the label

It can also be used to remove vignettes from car windows.

APPLICATION:

Product designed to repair small defects and cracks on enamel surfaces:

durable and long-lasting gloss finish on a range of surfaces.

bathtubs | paddling pools | washing machines | refrigerators stoves and etc.

PRODUCT FEATURES:



thermal resistant

moisture

resistant



interior & exterior





PRODUCT FEATURES:



in action



interior & exterior

COLORLESS



ready



Product code: DZN	25 ml
nr of pieces in a pack	12
nr of items on a layer	360
nr of items on a nallet	2520

PRODUCT FEATURES:



water and chemicals resistant



high



excellent coverage



drying time

25 ml
12
360
2520

PRODUCT FEATURES:



waterproof



can be processed



very



for quick repairs

Product code: DPEN	56 g
nr of pieces in a pack	10
nr of items on a layer	360
nr of items on a pallet	2160

DRAGON POWER GLUE HIGH TACK

montage glue







WHITE

A modern, single-component adhesive based on MS Polymer ideal for immediate fixing of components without the need for mechanical support. Particularly suitable for bonding heavy components. Creates a durable, flexible joint with high strength. Weatherproof, water-resistant and watertight. Free of isocyanates, solvents and phthalates.

APPLICATION:

Designed for bonding most materials used in construction, engineering and automotive. It has excellent adhesion to most materials, i.e. metal | natural stone | concrete | brick | glazed ceramics | wood | glass | various types of synthetic materials, etc. Can be used even on damp surfaces.



PRODUCT FEATURES:





interior & exterior





immediate adhesion

Product code: DKMPH	20 g	290 ml
nr of pieces in a pack	12	9
nr of items on a layer	360	216
nr of items on a nallet	2520	1296

EXCELLENT ADHESION FOR ALL MATERIALS:





CONCRETE







BRICK







CERAMICS



METAL





DRYWALLS

OSB BOARDS

WOOD





GLAZE

GLASS

DRAGON POWER GLUE CRYSTAL TACK

montage glue







TRANSPARENT

A modern adhesive based on MS polymers, suitable wherever a transparent connection is required. Permanently flexible, resistant to moisture and water. After complete drying, it can be painted with appropriate water-dispersion paints (other than alkyd resins). Does not contain silicone.

APPLICATION:

Designed for bonding most materials used in construction, engineering and automotive. It has excellent adhesion to most materials, i.e. metal | natural stone | concrete | brick | glazed ceramics | wood | glass | various types of synthetic materials, etc. Can be used even on damp surfaces.



DURABLE TRANSPARENT JOINT

PRODUCT FEATURES:



permanently



& exterior



high bond



excellent

Product code: DKMPH	20 g	290 ml
nr of pieces in a pack	12	9
nr of items on a layer	360	216
nr of items on a pallet	2520	1296

FIX STRONG GLUE

montage



TRANSPARENT AFTER DRYING

Ready-to-use, paste-like adhesive for finishing tasks in construction with excellent initial grip to typical substrates. Creates a durable transparent joint. It does not contain organic solvents.

APPLICATION:

Product intended for gluing elements made of: wood | metal | ceramics | glass | wood-like materials | cork | PVC | polystyrene | polyurethane and others

It can be used for sticking to all common substrates used in construction. The substrate must be porous.

PRODUCT FEATURES:



moisture resistant



interior & exterior





liquid

Product code: DKMF 360

FIX STRONG ADHESIVE

montage

EXTRA

Ready-to-use paste-like glue. Intended for finishing jobs in construction. It is characterized by excellent initial adhesion to typical substrates.

APPLICATION:

Product intended for bonding:

wood | metal | ceramics | glass | wood-like materials | cork PVC | polystyrene | polyurethane and others | for sticking to all typical substrates used in construction where at least one of the glued surfaces must be porous and absorbent

Efficiency: 1,5-3 m²/L.

PRODUCT FEATURES:



durability



interior & exterior

WHITE and TRANSPARENT



Product code: DKMFS nr of pieces in a pack

liquid nail



waterproof

140 g	Product code: DKA
15	nr of pieces in a pack
450	nr of items on a layer
2250	nr of items on a pallet

MIRROR ADHESIVE

montage

CONSTRUCTION ADHESIVE

montage





TRANSPARENT

High-quality, 100% solvent-free transparent adhesive – a sealant with a neutral curing system. Dedicated to the fixing and gluing of mirrors and glass mosaics. Its consistency and color mean that it can also be used to seal the edges of mirrors. Very elastic in all conditions.

APPLICATION:

Product intended for fixing:

all types of mirrors | mirror mosaic | decorative glass for mineral (plaster, concrete, cement and gypsum boards) wood-like (OSB, MDF) glass and ceramic (ceramic tiles, gres) substrates

It can be used to grout the edges of mirrors.

Efficiency: 1-2 m²/L.

PRODUCT FEATURES:



discoloration





waterproof



Product code: DKSLU	280 ml
nr of pieces in a pack	8
nr of items on a layer	240
nr of items on a pallet	1440



WHITE

Adhesive intended for joining finishing and decorative elements to various substrates in construction. Does not stain glued surfaces. Perfect for sensitive materials. After hardening, it can be painted.

APPLICATION:

Product intended for gluing elements made of: ceramics | glazes | terracotta | natural and artificial stones | wood-like materials | cork | polystyrene | coverings for typical substrates used in construction

Efficiency: 1,5-3 m²/L.

PRODUCT FEATURES:



for sensitive materials



& exterior





waterproof

roduct code: DKMCBD	280 ml
of pieces in a pack	8
of items on a layer	240
of items on a pallet	1440

POLYSTYRENE ADHESIVE

montage

SKIRTING ADHESIVE

montage

WOOD ADHESIVE

montage

HFAVY ADHFSIVE

montage





WHITE

Ready-to-use paste-like glue. It is characterized by excellent initial adhesion to typical substrates in construction. It does not contain organic solvents.

APPLICATION:

Product is intended for gluing finishing and decorative elements such as:

coffers | rosettes | polystyrene strips and boards for all common mineral substrates used in construction

It can be used for gluing panels and polystyrene insulation wallpapers.

Efficiency: 1,5 m²/L

PRODUCT FEATURES:







flexible



perfect adhesion

Product code: DKMSKR nr of pieces in a pack nr of items on a pallet



BEIGE

Professional, organic solvent-free, fast-setting adhesive. It is characterized by very good adhesion to the substrate and high strength parameters. Creates a flexible joint. Does not cause discoloration of the wood.

APPLICATION:

Product intended for gluing:

skirting boards | angles | quarter rounds | thresholds | ornamental elements | coffers of wood and other woodlike materials | mineral wool

For all standard construction substrates.

Efficiency: 1-2 m²/L.

PRODUCT FEATURES:



doesn't discolor boow



interior



very good adhesion



flexible

Product code: DKLI	280 ml
nr of pieces in a pack	8
nr of items on a layer	240
nr of itoms on a pallot	1///0



TRANSPARENT AFTER DRYING

Ready-to-use paste-like glue. It creates a moistureresistant, durable and flexible joint with excellent adhesion to all common substrates in construction. It does not stain glued surfaces and fills small unevenness.

APPLICATION:

The product is intended for gluing:

wooden slats | window sills | cork | thresholds | decorative elements of various materials | chipboard | fibreboards | composite panels etc.

Efficiency: 1,5-3 m²/L.

PRODUCT FEATURES:



waterproof



interior & exterior



paintable



flexible

Product code: DKMDK	280 ml
nr of pieces in a pack	8
nr of items on a layer	240
nr of items on a pallet	1440



BEIGE

Ready-to-use, paste-like adhesive for bonding most metals to a variety of porous substrates. Convenient to use, durable and resistant to weather conditions.

APPLICATION:

Product intended for gluing:

ceramic tiles | decorative elements of metal, stone, glass and ceramics | wall panels | plastic plates | window sills | thresholds plaster

Efficiency: 1-2 m²/L.

PRODUCT FEATURES:



resistant



interior & exterior



waterproof



vibration resistance

Product code: DKMMK	280 ml
nr of pieces in a pack	8
nr of items on a layer	240
nr of items on a pallet	1440

	DRAGON POWER	STRONG	ADHESIVE MIRROR Montage	ADHESIVE CONSTRUCTION MONTAGE	ADHESIVE POLYSTYRENE MONTAGE	ADHESIVE SKIRTING MONTAGE	ADHESIVE WOOD Montage	ADHESIVE HEAVY Montage
Grammage	20 g / 290 ml	20 ml / 140 g / 280 ml	280 ml	280 ml	280 ml	280 ml	280 ml	280 ml
Color	white / transparent	white / transparent	transparent	white	white	beige	transparent	beige
Formula	hybrid polymer	water formula	silicone formula	water formula	water formula	water formula	water formula	caoutchouc
Use	interior/ exterior	interior/ exterior	interior	interior/ exterior	interior	interior	interior/ exterior	interior/ exterior
Type of glued surface	all construction material	all construction material	wood mineral materials wood-like materials glass ceramics	wood wood-like materials stone ceramics styrofoam concrete plaster	polystyrene	wood wood-like materials mineral wool concrete plaster	wood-like materials concrete plaster	wood-like materials stone concrete plaster
Waterproof	yes	no	yes	no	no	yes	no	yes
Moisture resistance	yes	yes	yes	yes	no	yes	yes	yes
Contains solvents	no	no	no	no	no	no	no	yes
Suitable for sensitive materials	yes	yes	yes	yes	yes	yes	yes	no
Glues slightly damp substrate	yes	no	no	no	no	no	no	no
Possibility of coverage	no	yes	no	yes	yes	yes	yes	no

DENATURATE

Solvent

DENATURAL

Solvent

KEROSENE

Solvent







SOLVENTS

Product contains approx. 92% ethyl alcohol. It can be mixed with water in any ratio. It has a characteristic smell. Compliant with PN standards.

Product contains approx. 85% isopropanol. It can be mixed with water in any ratio. It has a characteristic smell.

An excellent product intended primarily for lighting purposes. It has lubricating, penetrating and anti-corrosive properties. Effective as a cleaner and degreaser of metal surfaces with grease and oil.

APPLICATION:

Product intended for:

washing tools | surface degreasing | dilution of spirit paints and varnishes

APPLICATION:

Product intended for:

cleaning and degreasing surfaces and tools dilution of spirit paints and varnishes

APPLICATION:

Product intended for:

lighting purposes | cleaning tools and other dirty elements

It can be used as an anti-corrosion cleaner.

GENERAL USE SOLVENTS

PRODUCT FEATURES:



many uses 92% ETHANOL



degreases



Product code: DDT	500 ml TW
nr of pieces in a pack	20
nr of items on a layer	160
nr of items on a nallet	1120

PRODUCT FEATURES:



effectively degreases 85% ISOPROPANOL



Product code: DDL

nr of pieces in a pack nr of items on a layer nr of items on a pallet

degreases

500 ml TW



improves liquidity

_		_

PRODUCT FEATURES:



for lighting purposes

100% KEROSENE



Product code: DNS	500 mITW	500 ml ME	5 L
nr of pieces in a pack	20	20	1
nr of items on a layer	160	120	36
nr of items on a pallet	1120	960	108



- Perfectly degreases
- Cleans bicycle chains
- Safe for car paint, tires and plastic parts
- Effectively removes greasy stains from fabric upholstery



EXTRACTION GASOLINE







Product useful during finishing and renovation works, as well as in factories and industrial workshops. A must-have product in every garage.

APPLICATION:

Product intended for:

removing oil stains degreasing the surface before painting dilution of oils and waxes cleaning parts, tools and other dirty items

PRODUCT FEATURES:



many

EXTRACTION GASOLINE



degreases



safe for surfaces



easy to apply

Product code: DBE

ALL PURPOSE

Solvent



All purpose solvent used in every workshop and garage. Useful for painting or renovations.

APPLICATION:

Product intended for:

diluting oil, phthalic, chlorinated rubber, chemically hardening, renovation products (paints, varnishes, glues, sealing compounds, etc.) cleaning tools, brushes and dirty elements after painting

PRODUCT FEATURES:



many uses



improves liquidity

Product code: DRU	500 ml	500 ml ME	2,5 L	5 L	20 L	200 L
nr of pieces in a pack	20	20	4	1	1	1
nr of items on a layer	160	120	24	33	- 11	variables
nr of items on a pallet	960	960	216	165	33	2

Solvent

ACETONE ACETONE

Product intended for degreasing surfaces before painting and gluing. Useful for diluting nitrocellulose products, dissolving fats, waxes, etc. and for washing dirty brushes and other tools.

APPLICATION:

Product intended for:

degreasing surfaces before painting and gluing | dilution of nitrocellulose products | dissolving fats, waxes, etc. | washing dirty brushes and other tools

Colorless liquid with a characteristic acetone odor.

BALSAMIC TERPENTIN

Solvent natural origin



A superior solvent of natural origin, improving the flow of the varnish and the quality of the varnish coating. Particularly useful for renovation works, restoring old furniture, paintings and paints.

APPLICATION:

Product intended for:

dilution of oil paints | removing oil stains after painting | cleaning greasy plastic floor coverings washing metal parts from grease, oil and residues of oil products

PAINTER'S NAPHTHA

Solvent modified



Product with a wide general use. Low sulfur thinner. It does not cause yellowing of the diluted product.

APPLICATION:

Product intended for:

dilution of paints, varnishes, phthalic, oil, bituminous products and varnishes | precleaning of dirty parts, tools and elements after painting and gluing

XYLENE

Solvent



Multipurpose solvent, widely used in all kinds of renovation jobs. The high quality of the product and low content of sulfur compounds and impurities eliminate the risk of changing the color or properties of the preparations diluted with it.

APPLICATION:

Product intended for:

diluting bituminous products, varnishes, adhesives, putties, oil-phthalic, phthaliccarbamide, acrylic, chlorinated rubber sealants | cleaning brushes and tools

PRODUCT FEATURES:



100% ACETONE





Product code: DAC	500 ml	500 ml ME	2,5 L	5 L	20 L
nr of pieces in a pack	20	20	4	1	1
nr of items on a layer	160	120	24	33	11
nr of items on a pallet	960	960	216	165	33

PRODUCT FEATURES:



many



improves liquidity

Product code: DTB	500 ml	500 ml ME		201	
Product code: DIB	300 1111	300 IIII ME	3 L	20 L	
nr of pieces in a pack	20	20	1	1	
nr of items on a layer	160	120	33	11	
nr of itoms on a pallot	960	060	165	22	

PRODUCT FEATURES:



low sulfur content





degreases



improves liquidity

Product code: DBL	500 ml	500 ml ME	2,5 L	5 L
nr of pieces in a pack	20	20	4	1
nr of items on a layer	160	120	24	33
nr of items on a pallet	960	960	216	165

PRODUCT FEATURES:





high cleanliness





improves liquidity

Product code: DKS	500 ml	500 ml ME	5 L
nr of pieces in a pack	20	20	1
nr of items on a layer	160	120	33
nr of items on a pallet	960	960	165

TOLUENE

Solvent



High-quality solvent with low sulfur content. It does not cause yellowing of the diluted product.

APPLICATION:

Product intended for:

diluting paints and varnishes to working viscosities cleaning metal parts from grease and oil and tools after painting

PRODUCT FEATURES:



many



low sulfur

content



100% TOLUENE

Product code: DTO	500 ml	500 ml ME	5 L	
nr of pieces in a pack	20	20	1	
nr of items on a layer	160	120	33	
nr of items on a pallet	960	960	165	

ISOPROPANOL

Solvent



HIGH PURITY

ISOPROPANOL



Isopropanol in spray form is a preparation containing high purity isopropyl alcohol. The product evaporates quickly without leaving any traces. Chemically neutral to most materials commonly used in electronics, electrical engineering and optics.

APPLICATION:

Product used for:

cleaning of electronic and electric parts | cleaning optics: telescopes, binoculars, glasses, magnifying glasses, camera lenses, night vision lenses | degreasing and removing contamination from optical fibers before fitting or welding joints removing lubricants and waterproof fats

PRODUCT FEATURES:



easy spray application 100% ISOPROPANOL



efficient



degreases

Product code: DI	500 ml TW	500 ml ME	5 L	400 AE
nr of pieces in a pack	6	20	1	20
nr of items on a layer	168	120	36	120
nr of items on a pallet	840	960	108	960

NITRO SOLVENT

Solvent



Product is intended for diluting nitrocellulose products to working viscosities. It does not cause yellowing of the diluted product.

APPLICATION:

Product intended for:

dilution of nitrocellulose products (paints, varnishes, adhesives, sealants, etc.) to working viscosities for cleaning tools, brushes and other dirty elements after painting

It can be used as a varnish remover.

PRODUCT FEATURES:





low sulfur content



improves liquidity



doesn't cause yellowing

Product code: DRN	500 ml	500 ml ME	2,5 L	5 L	20 L
nr of pieces in a pack	20	20	4	1	1
nr of items on a layer	160	120	24	33	11
nr of items on a pallet	960	960	216	165	33

OLI-PHTHALIC

Solvent

CHLORINATED RUBBER

POLYURETHANE

Solvent

EXTRACTION

Solvent



The product is intended for diluting oil and phthalic products to working viscosities. Product with low sulfur content containing additives to improve the flow of the varnish. It does not cause yellowing of the diluted product.



Product is intended for diluting chlorinated rubber products to working viscosities. It does not cause yellowing of the diluted product.



High-quality solvent containing additives to improve paint flow. Product with low sulfur content. It does not cause yellowing of the diluted product.



Universal product for use as a solvent and surface degreaser. Effectively cleans all surfaces of oils, greases and fats. Prepares the substrate for further processing.

APPLICATION:

Product intended for:

dilution of paints, varnishes, adhesives, sealants, etc., oil and phthalic to working viscosities | cleaning tools and elements contaminated with oil and phthalic products

APPLICATION:

Solvent

Product intended for:

diluting paints, varnishes, adhesives, sealing compounds, etc. to working viscosities cleaning tools and elements contaminated with chlorinated rubber products

APPLICATION:

Product intended for:

diluting polyurethane paints, varnishes, adhesives, sealants etc. to working viscosities cleaning tools and elements soiled with polyurethane products

APPLICATION:

Product intended for:

degreasing the surface before painting | dilution of fats, oils, waxes | cleaning parts, tools, dirty elements

PRODUCT FEATURES:



many

improves

liquidity



low sulfur content



doesn't cause yellowing



PRODUCT FEATURES:



many uses



low sulfur content



improves liquidity



Product code: DRC	500 ml	500 ml ME	5 L
nr of pieces in a pack	20	20	1
nr of items on a layer	160	120	33
nr of items on a nallet	960	960	165

PRODUCT FEATURES:



colorless



low sulfur content



improves liquidity



Product code: DRP	500 ml	500 ml ME	5 L
nr of pieces in a pack	20	20	1
nr of items on a layer	120	120	33
nr of items on a pallet	960	960	165

PRODUCT FEATURES:



many uses



degreases



improves liquidity

Product code: DREX	500 ml	500 ml ME	5 L
nr of pieces in a pack	20	20	1
nr of items on a layer	160	120	33
nr of items on a pallet	960	960	165



Solvent

EPOXY Solvent

WHITE SPIRIT

Solvent



The product contains additives that improve the flow of the varnish. Low-sulfur solvent It does not cause yellowing of the diluted product.



Paint solvent with low sulfur content. It does not cause yellowing of the diluted product. It can be used as a direct replacement for white spirit.



Product with low sulfur content. It contains additives that improve the flow of the varnish. It does not cause yellowing of the diluted product.



High-quality solvent containing additives that improve the flow of the paint. It has a low odor. It does not contain toluene.

APPLICATION:

Product intended for:

diluting acrylic products (paints, varnishes, glues, sealants, etc.) to working viscosities cleaning tools, brushes and dirty elements after painting

APPLICATION:

Product intended for:

diluting oil, phthalic and bituminous paints, varnishes, adhesives, sealants etc. and varnishes to working viscosities washing tools and elements contaminated with these products washing metal parts from grease and oil

APPLICATION:

Product intended for:

diluting epoxy paints, varnishes, adhesives, sealants, etc. to working viscosities | cleaning tools and elements contaminated with epoxy products

APPLICATION:

Product intended for:

dilution of low-aromatic oil and phthalic products (paints, varnishes, sealants) to working viscosities | cleaning tools, parts and dirty elements after working with oilphthalic products

PRODUCT FEATURES:



colorless





improves liquidity



doesn't cause yellowing

low sulfur

Product code: DRA 500 ml 500 ml ME nr of pieces in a pack nr of items on a pallet

PRODUCT FEATURES:



many uses



low sulfur



improves liquidity

Product code: DRL nr of pieces in a pack nr of items on a pallet

PRODUCT FEATURES:



many



low sulfur content



improves liquidity



doesn't cause yellowing

Product code: DRE	500 ml	500 ml ME	5 L
nr of pieces in a pack	20	20	1
nr of items on a layer	160	120	33
nr of items on a pallet	960	960	165

PRODUCT FEATURES:



many uses



not very bothersome



improves liquidity

Product code: DRWS	500 ml	500 ml ME
nr of pieces in a pack	20	20
nr of items on a layer	160	12
nr of items on a pallet	960	960



ACRYLIC SOLVENT

ALKYD SOLVENT

WHITE SPIRIT **SUBSTITUTE**





COLORLESS









COLORLESS

Acrylic solvent is ideal for diluting acrylic products. The use of a solvent makes it possible to ensure the appropriate viscosity of the product, thanks to which its use is correct and efficient.

APPLICATION:

Product intended for:

dilution of solvent-based acrylic products (paints, varnishes, adhesives, sealants, etc.) to working viscosities cleaning tools, brushes and other dirty elements after working with acrylic products

APPLICATION:

layer.

Product intended for:

dilution of alkyd products (paints, varnishes, adhesives, etc.) as well as oil products and natural resins, masking transparent varnishes to working viscosities | cleaning tools, brushes and dirty elements after painting

Perfect for diluting alkyd products. Helpful in preparing

the surface of resin-rich wood before applying a decorative

APPLICATION:

Product intended for:

rubber and polyvinyl products

diluting chlorinated rubber products (paints, varnishes, adhesives, sealants, etc.) to working viscosities | cleaning tools, brushes and dirty elements after painting

White spirit substitute is ideal for diluting chlorinated

PRODUCT FEATURES:



VOC is about **3 times lower** compared to traditional organic solvents and amounts voc to 275 g/L



delicate fragrance



water formula

Product code: ZRA	500 ml
nr of pieces in a pack	8
nr of items on a layer	136
nr of items on a nallet	916

PRODUCT FEATURES:



VOC is about 4 times lower compared to traditional organic solvents and amounts voc to 150 g/L.



Product code: ZRAL nr of items on a nallet

delicate fragrance



water formula

PRODUCT FEATURES:



VOC is about **2 times lower** compared to traditional organic solvents and amounts voc to 380 g/L.



delicate fragrance



water formula

Product code: ZRC	500 ml
nr of pieces in a pack	8
nr of items on a layer	136
nr of items on a pallet	816



BRUSH CLEANER

NITRO SOLVENT





COLORLESS

This product enables guick and easy dilution of various types of phthalic products. It works perfectly with most anti-corrosion paints.

APPLICATION:

Product intended for:

diluting phthalic products (paints, varnishes, etc.) to working viscosities | cleaning tools, brushes and dirty elements after painting

PRODUCT FEATURES:



VOC is about 4 times lower compared to traditional organic solvents and amounts voc to 180 g/L.



delicate fragrance









COLORLESS

A solvent intended for diluting most nitrocellulose products. It can be used as a paint stain remover.

APPLICATION:

Product intended for:

dilution of nitrocellulose products (paints, varnishes, adhesives, sealants, etc.) to working viscosities | cleaning tools, brushes and dirty elements after painting

PRODUCT FEATURES:



renewable sources



delicate fragrance

Product code: ZRN	500 ml
nr of pieces in a pack	8
nr of items on a layer	136
nr of items on a nallet	816

Why Dragon BIO solvents?

Dragon Poland is the first manufacturer in Poland which, acting responsibly, introduced solvents to its offer based on biodegradable raw materials.

The products have been developed with the environment and user safety in mind while maintaining excellent quality.







contains biodegradable ingredients



from renewable sources



reduced VOC content



from natural sources

PRODUCTS BASED ON RENEWABLE SOURCES



Our products contain less than 7% chemicals from petroleum processing.

REDUCED VOC CONTENT



These products have a significantly reduced VOC content (<150 g/L). Volatile organic compounds are chemicals which, together with nitrogen oxides, carbon oxides and sulfur dioxide, are the main source of environmental pollution.

CONTAIN BIODEGRADABLE INGREDIENTS



The biodegradation process is the decomposition of organic compounds into simple inorganic compounds. These compounds are decomposed by living organisms and natural factors.

WATER-BASED PRODUCTS




Out of concern for the environment, up to 60% of the chemical compounds have been replaced with water. Water is the most famous solvent.

PRODUCTS BASED ON NATURAL SOURCES



The composition of the new, alternative specialist Dragon BIO solvents is based mainly on biodegradable natural raw materials.

The composition of an exemplary Dragon BIO solvents:

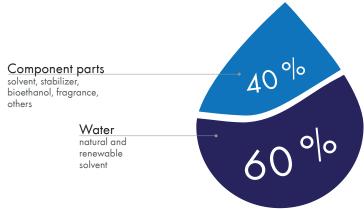

DRAGON BIO Solvents

Choose consciously.

Comparison of BIO and traditional solvents*

		DRAGON BIO solvents	Traditional solvents
	Petroleum ingredients	3 - 7%	95 - 100%
10	Water content	approx. 65%	0%
liness	VOC harmful volatile compounds	low	high
Eco-friendliness	Biodegradation	high	low
Eco-fr	From natural sources	90%	0%
	From renewable sources	yes	no
	Safe for the environment	yes	no
S	Effectiveness of operation	high	high
ature	Homogeneity	yes	yes
ct fei	Colorless	yes	yes
Product features	Danger of spontaneous combustion	medium	high
ш.	Expiration date	2 years	2 years

How is this possible?

Thanks to the development of innovative technology, BIO solvents enable the permanent mixing of water and organic solvents. As a result, the composition of BIO solvents is approx. 90% natural ingredients, as compared to 0% for traditional solvents.

^{*}Applies to the following solvents: acrylic, alkyd, white spirit substitute, brush cleaner.

SANITARY SILICONE

UNIVERSAL SILICONE

ACRYLIC SEALANT





WHITE



WHITE

Quick-hardening silicone binder which after contact with atmospheric moisture creates an excellent, flexible and nonshrink filling mass. It is characterized by very good adhesion.

One-component silicone binder which in contact with atmospheric moisture creates an excellent, flexible and shrink-free filling mass. It withstands large temperature differences, UV radiation, hot water, oils and fats.

Resistant to moisture and short-term contact with water, UV radiation and temperature fluctuations. It is characterized by high adhesion to smooth and porous surfaces such as wood, plaster, plasterboards. After drying, you can paint.

APPLICATION:

SEALANTS

Product intended for sealing:

bathtubs | wash basins | paddling pools | showers | of sinks other sanitary and kitchen appliances | ceramic, porcelain and clinker tiles | sanitary ceramics | impregnated wood enamel surfaces, glass, porcelain, anodized aluminum, stainless steel

Efficiency: with a 4x4 joint-17 running meters / 280 ml depending on the size of the joint.

APPLICATION:

Product intended for sealing:

door frame | windows | ceramic | porcelain and clinker tiles sanitary ceramics | impregnated wood | surfaces made of glass, porcelain, anodized aluminum, stainless steel, enamel surfaces and other joinery elements | filling joints and gaps

Efficiency: with a 4x4 joint-17 running meters / 280 ml depending on the size of the joint.

APPLICATION:

Product intended for:

filling cracks and scratches on walls and ceilings | sealing window and door frames | filling gaps and cavities in concrete at the junction of walls masonry and window sills

Efficiency: with a 4x6 joint, approx. 11,5 mb / 280 ml.

PRODUCT FEATURES:



waterproof





excellent



flexible

Product code: DSS	100 ml	280 ml
nr of pieces in a pack	15	8
nr of items on a layer	450	240
ar of itoms on a nallot	2250	1440

PRODUCT FEATURES:



waterproof



interior & exterior



Product code: DSU

nr of pieces in a pack

nr of items on a nallet

doesn't flexible shrink

2250



excellent

paintable

moisture

resistant

PRODUCT FEATURES:



interior & exterior





Product code: DAK nr of pieces in a pack nr of items on a naller 2250

LATEX SEALANT

BITUMINOUS SEALANT

MONTAGE FOAM

polyurethane



BITUM
BITUMINOUS
SEALANT

ROOT SEALA
RICHARDS

IN THE PROPERTY OF THE PROPERTY

BLACK

Perfectly adheres to most construction surfaces, such as concrete, plasterboard, ceramics, and wood. Resistant to temperature fluctuations in the range -20°C to +75°C, UV radiation, moisture and short-term contact with water. Easy to apply and form - does not drip.

APPLICATION:

Product intended for:

sealing corner joints in the joints of structural and building elements grouting joints with the wall of door and window frames, window sills, thresholds, strips, coffers, etc. fabrics from natural and artificial materials filling scratches and cracks on walls and ceilings

Efficiency: with a 4x6 joint, approx. 11,5 mb / 280 ml.

PRODUCT FEATURES:



moisture resistant



interior & exterior



doesn't drip



Easy to use, it provides a durable and flexible joint with excellent adhesion to sheet metal and all typical construction substrates, even wet ones. Does not run off vertical surfaces. The resulting joint is resistant to UV radiation.

APPLICATION:

WHITE

Product intended for:

repair of cracks and damage to roofing insulation of vertical buildings, cracks in walls, leaks in gutters etc. sealing of connections around chimneys, ventilation, hatches, skylights, gutters (also galvanized), etc. gluing roofing paper

Efficiency: 0,6 m²/L.

PRODUCT FEATURES:



doesn't flow



interior & exterior



thermal resistant



flexible

roduct code: DUB	280 ml	
of pieces in a pack	8	
of items on a layer	240	
of items on a pallet	1440	

One-component polyurethane foam PPU-1 with a hose applicator is intended for assembly, sealing and soundproofing. The foam hardens through contact with moisture in the air.

APPLICATION:

Product intended for:

embedding of doors and windows | thermal insulation of water, sewage and central heating networks | sealing and installation of window sills | thermal insulation of roofs and flat roofs | filling gaps in thermal insulation when insulating buildings

PRODUCT FEATURES:



seals



interior & exterior



thermal resistant



very durable

Product code: DPMP	625 g
nr of pieces in a pack	12
nr of items on a layer	192
nr of items on a pallet	768



QUICK-PAINTABLE ACRYLIC

WFT ON WFT

SANITARY ACRYLIC

LIGHT ACRYLIC **PUTTY**

UNIVERSAL **ACRYLIC**



WHITE

WHITE



WHITE



WHITE

A single-component, plastic-elastic sealing compound on an acrylic dispersion basis for sealing and repairing joints and cracks in walls and plaster with rapid paintability. It can be painted with alkyd and water-based paints as early as 15 minutes after application.

APPLICATION:

Designed for: repair and sealing of cracks, cavities in walls and ceilings (plaster, plasterboard, putty). Sealing of corners and joints made of plaster-cardboard panel, around stucco, trims, suspended ceilings, window sills, built-in wardrobes, window and door frames, etc.

Yield per 280 ml cartridge:

approx. 18 linear metres of 5 mm x 3 mm grout

One-component, highly flexible acrylic sealant with excellent adhesion and moisture resistance. For rooms with high humidity: kitchens, bathrooms, toilets, etc. It is easy to apply, does not run off during application and is mould resistant.

APPLICATION:

Designed for: masking of cracks and crevices on walls and ceilings, especially in sanitary areas. Sealing of joints between wall and shower, around ceramic and plastic (PVC) decorative elements.

Yield per 280 ml cartridge: approx. 18 linear metres of 5 mm x 3 mm grout

APPLICATION:

Designed for: sealing of low-mobility joints between different building materials (wood, concrete, brick, etc.). Sealing of joints between windows, walls, doors, etc.

A one-component, water-based acrylic sealer for general

gap filling and wall repairs prior to painting. Once cured,

it provides a durable waterproof layer.

Yield per 280 ml cartridge: approx. 18 linear metres of 5 mm x 3 mm grout

APPLICATION:

Designed for: grouting between masonry and skirting boards, stairs, ceiling and electrical sockets. Filling of cracks and fissures in walls, floors, ceilings and corners.

All-purpose sealant on an acrylic dispersion basis for filling

cracks and joints indoors. It has excellent adhesion to all porous

substrates used in the construction industry.


Yield per 280 ml cartridge: approx. 18 linear metres of 5 mm x 3 mm grout

PRODUCT FEATURES:



Product code: DAKSM







crack-resistant



paintable

for damp

surfaces

PRODUCT FEATURES:



mould resistant

oduct code: DAKS	280 ml
of pieces in a pack	8
of items on a layer	240
of items on a nallet	1440

PRODUCT FEATURES:



easy to smooth





Product code: DAKSL

nr of pieces in a pack

nr of items on a naller

280 ml

240



it forms a durable water-repellent film



paintable

waterproof

after curing

PRODUCT FEATURES:



UV resistant

Product code: DAKU	100 ml	280 ml
nr of pieces in a pack	15	8
nr of items on a layer	600	240
nr of items on a pallet	3000	1440

nr of pieces in a pack nr of items on a nallet 240

nr of nr of

ACRYLIC FOR DRYWALL



WHITE

One-component sealant on an acrylic emulsion basis reinforced with silicone emulsion for joints in plasterboard technology (drywall). It has excellent grip and good flexibility.

APPLICATION:

Designed for: jointing plasterboard in drywall technology (including jointing corners). Masking of cracks and crevices in concrete, masonry, plaster, wood, etc. Grouting of coffers and decorative panels, door and baseboards, window sills, etc.

Yield per 280 ml cartridge: approx. 18 linear metres of 5 mm x 3 mm grout

PRODUCT FEATURES:



waterproof after curing



interior & exterior



UV resistant



does not discolour paint coatings

Product code: DAKPGK	280 ml
nr of pieces in a pack	8
nr of items on a layer	240
nr of items on a pallet	1440



FOR JOINTS, GAPS AND CRACKS

PAVING STONES SEALER

Aquastop

BRICK AND STONE SEALER

Aquastop

UNIVERSAL SEALER

Aquastop

INSULATION AND BUILDING **SEALERS**





A product with a colorless coating that will perfectly impregnate the cobblestones and emphasize the intensity of the color of the substrate. Increases resistance to abrasion and UV radiation. It protects against the influence of external factors, and the deposition of dust and dirt.

APPLICATION:

Product is intended for surface protection of: paving stones and slabs | sandstone coverings and other porous stones | concrete elements against the negative influence of external factors

Efficiency: 12-10 m²/L.

PRODUCT FEATURES:



resistant





protects against efflorescence

Product code: DAB nr of pieces in a pack



Creates a colorless coating that emphasizes the intensity of the color of the substrate. Increases resistance to abrasion and UV radiation. It protects against the influence of external factors (e.g. moisture, frost, etc.), deposition of dust and dirt.

APPLICATION:

Product is intended for the protection of surfaces: unglazed clinker | natural stone | unpolished stoneware

Efficiency: 2-10 m²/L.

PRODUCT FEATURES:



* protects from external factors



exterior



resistant



highlights the color of the ground

Product code: DAKK	1 L	2,5 L	5 L
nr of pieces in a pack	12	4	1
nr of items on a layer	72	24	33
nr of items on a pallet	432	216	165



Universal product for many types of substrates. Creates a colorless coating that emphasizes the intensity of the color of the painted surface. Increases resistance to abrasion and UV radiation. It protects against the influence of external factors, and the deposition of dust and dirt.

APPLICATION:

Product is intended for the protection of surfaces: unglazed clinker | natural stone | cobblestones | paving slabs ceramic tiles | bricks | concrete | cement-lime substrates | unpolished granite and marble sandstone ceramic and concrete roof tiles

Efficiency: 2-10 m²/L.

PRODUCT FEATURES:



* protects from <u>/</u> external factors





breathable coating



protects against efflorescence

Product code: DAU	1 L	2,5 L	5 L
nr of pieces in a pack	12	4	1
nr of items on a layer	72	24	33
nr of items on a pallet	432	216	165

LIQUID FOIL INTERIOR



Professional liquid film for interior use forming an insulating and sealing coat providing excellent protection against moisture and water. Characterised by very good adhesion to typical substrates used in construction.

APPLICATION:

Designed for:

beeing used as the first waterproofing layer for flexible, watertight protection of concrete and cement surfaces under the ceramic tile cladding, internal. It can be applied to vertical and horizontal surfaces.

Laundries | Bathrooms | Kitchens | Cellars | Garages Efficiency: $0.85 - 2.27 \text{ m}^2/\text{kg}$ for one layer

PRODUCT FEATURES:



ready to use

bridging cracks

and fissures

in substrate



suitable for interiors with underfloor heating

Product code: DIFW	1 ,5 kg	4,5 kg	15 kg
nr of pieces in a pack	12	1	1
nr of items on a layer	96	24	11
nr of items on a pallet	384	120	44

INTERIOR

LAUNDRIES • BATHROOMS • KITCHENS • CELLARS • GARAGES



EXTERIOR BALCONIES • TERRACES SWIMMING POOLS



1,5 kg, 4,5 kg, 15kg	Avalible capacities	1,5 kg, 4,5 kg, 15kg
plastic bucket	Packaging type	plastic bucket
light blue	Coating color after drying	blue
interiors, suitable for interiors with underfloor heating	Application areas	exteriors, resistant to chlorinated water
concrete and cement surfaces under the ceramic tile cladding internal	Substrate type	concrete and cement surfaces under tile, natural stone and others external
brush or roller	Application method	brush or roller
2	Layers	2 or 3
+10°C to +30°C	Temperature range in which work can be performede	+10°C to +30°C
high	Flexibility	high
-	Product standard	PN-EN 14891:2012
after minimum 2 h	Applying second layer of waterproofing	after minimum 2 h
around 24 h	Waiting time before installing tiles	around 24 h
1,47 \pm 0,1 g/cm 3 in 20°C	Density	1,47 \pm 0,1 g/cm³ in 20°C
up to 3,0 mm	cracks bridging	≥ 0,75 mm
-	Frost resistance	yes

LIQUID FOIL EXTERIOR



Professional liquid film for outdoor applications that forms an insulating and sealing film providing excellent protection against moisture and water. It is resistant to chlorinated water.

APPLICATION:

Designed for:

beeing used as a first waterproofing layer for flexible, waterproof protection of concrete and cement surfaces under tile, natural stone and other outdoor cladding. Balconies | Terraces | Swimming pools

Efficiency: 0.85 - 2.27 m²/kg for one layer

PRODUCT FEATURES:



ready to use





excellent



bridging cracks and fissures in substrate

Product code: DIFZ	1,5 kg	4,5 kg	15 kg
nr of pieces in a pack	12	1	1
nr of items on a layer	96	24	11
nr of items on a pallet	384	120	44



DRAGON BIO PRESERVER FOR MINERAL SUBSTRATES



High-quality product intended for effective hydrophobization, protection and refinement of most mineral substrates, both indoors and outdoors. It has a high penetration depth and quick hardening. It creates a water-repellent and water-vapour permeable, colorless protection.

APPLICATION:

Product is intended for waterproofing most mineral substrates:

especially tiles | clinker | unglazed tiles | stoneware | terracotta | ordinary brick | as well as various natural stones | sandstone | granite | marble | plaster

Perfect for the renovation of natural stone.

NATURAL STONE E.G. SANDSTONE GRANITE, MARBLE

BRICK

CERAMIC STONEWARE

UNGLAZED TILES





hydrophobic coating



protects from external factors



UV i resistant



penetration depth

Product code: ZIMP	1L	5 L
nr of pieces in a pack	6	1
nr of items on a layer	96	36
nr of items on a pallet	576	108

PAVING AND FACADE CLEANER



It works quickly and effectively, keeping the surface clean for a long time. It delays the growth of mosses and algae. It enhances the surface structure and restores its natural color. It does not corrode metal parts.

APPLICATION:

Product intended for:

removing oil and grease stains and dirt of natural origin (bird droppings, leaf remnants) | cleaning roof tiles, paving stones, paving tiles, building facades, natural stone surfaces and other ceramic and concrete substrates

Efficiency: 5 m²/L.

PRODUCT FEATURES:



exterior



restores natural color



delays the growth of algae and mosses

Product code: DSCKB	5 L
nr of pieces in a pack	3
nr of items on a layer	36
nr of items on a nallet	108

CEMENT & EFFLORESCENCE REMOVER



A powerful, reliable agent for removing cementlime stains, remains of cement and concrete mortar, as well as efflorescence and lime residues from various types of surfaces. It does not damage or discolor the cleaned surfaces.

APPLICATION:

Product intended for cleaning:

ceramic wall and floor tiles | stone tiles | floor tiles | stoneware tiles | clinker | facades made of natural and artificial stone | sandstone | granite

Efficiency: 5 m²/L.

PRODUCT FEATURES:



apply by brush or spray



interior & exterior



safe for surfaces



doesn't discolor cleaned surfaces

Product code: DSUCW	5 L
nr of pieces in a pack	3
nr of items on a layer	36
nr of items on a pallet	108



DEEPLY PENETRATING PRIMER

acrylic



UNIVERSAL **PRIMER**

acrylic



PRIMER CONCENTRATED 1:5

acrylic



It reduces the water absorption of the substrate, eliminates

excessive water absorption, strengthening the substrate. Increases the adhesion of subsequent, applied layers.

Lowers the consumption of dispersion paints. After drying,

it creates a transparent coating, permeable to water vapour.

Product is intended for priming porous and absorbent surfaces:

It is also used to ensure proper adhesion of topcoat

plasterboards | cement boards | floors | plasters | e.t.c.

PREPARATION

Effectively reduces the absorbability of the substrate and unifies the parameters of the entire primed surface. After drying, it creates a transparent, flexible layer that is permeable to water vapour.

APPLICATION:

Product is intended for priming porous and absorbent surfaces: plasterboards | cement boards | floors | plasters

It is also used to ensure proper adhesion of topcoat preparations to the protected surface.

Efficiency: 10-20 m²/L.

PRODUCT FEATURES:



Product code: DGG

nr of pieces in a pack

PRIMERS

drying time



interior & exterior



strengthens the substrate



Effectively reduces the absorbability of the substrate, unifies the parameters of the entire primed surface, eliminates excessive water absorption, strengthening the substrate. Increases the adhesion of subsequent applied layers.

APPLICATION:

Product is intended for priming porous and absorbent surfaces: plasterboards | cement boards | floors | plasters | etc.

Also used under paints, adhesives, selfleveling compounds, putties, ceramic tiles, dispersion plasters, paper, vinyl and fiberglass wallpapers.

Efficiency: 10-20 m²/L.

PRODUCT FEATURES:



drying _ 2 h | time



interior & exterior



Product code: DGU

strengthens the substrate



improves

strengthens

preparations to the protected surface.

Efficiency: 10-20 m²/L after dilution.

PRODUCT FEATURES:

time



interior & exterior



APPLICATION:



Product code: DGK

FOR PAINTING AND GLUING



SPECIALIZED PRIMERS

STACKING PRIMER GT80 CONCRETE CONTACT

WET ROOMS PRIMER GU32





A ready-to-use primer increasing the adhesion of lowabsorbency substrates. It contains quartz grains that quarantee roughness increasing the contact surface with the outer layer. It is perfect for difficult and smooth surfaces such as prefabricated elements.

APPLICATION:

Product intended for:

use as a base to strengthen the substrate before applying a plaster layer use on concrete and traditional wall surfaces intended for plastering: bricks, cement blocks and walls made of gypsum boards, also with polystyrene insulation

Efficiency: 4 m²/L.

PRODUCT FEATURES:



Product code: DGSB

contains quartz grains





breathable

coating





Universal acrylic primer containing polymers of increased water resistance, intended for priming walls or ceilings before painting with a topcoat in rooms with increased humidity, such as kitchens or bathrooms, as well as garages and basements.

APPLICATION:

Product intended for priming:

plasterboard cement board mineral floors plasters (also dispersion plasters), etc.

Used for paints, adhesives, self-leveling compounds, putties, ceramic tiles, dispersion plasters, paper, vinyl and fiberglass wallpapers.

Efficiency: 10-20 m²/L.

PRODUCT FEATURES:



with a roller or brush





drying



breathable coating

Product code: DGWP	1L	5 L
nr of pieces in a pack	6	1
nr of items on a layer	96	36
	F7/	100

DEEP PENETRATING PRIMER DG10



The first primer in Poland certified by the German Ecological Quality Mark: Blauer Engel. Effectively reduces the absorbability of the substrate and unifies the parameters of the entire primed surface. After drying, it creates a transparent, flexible layer that is permeable to water vapour.
APPLICATION:

Product is intended for priming porous and absorbent surfaces: plasterboards | cement boards | floors | plasters | e.t.c.

It is also used to ensure proper adhesion of topcoat preparations to the protected surface.

Efficiency: 10-20 m²/L.

PRODUCT FEATURES:



leaves a blue coating



interior & exterior



drying



breathable coating

Product code: DGG/2	1L	5 L	
nr of pieces in a pack	6	1	
nr of items on a layer	96	36	
nr of itoms on a nallot	576	10.0	

THE ONLY **PRIMER IN POLAND WITH GERMAN ECOLOGICAL LABEL**



PRIMERING IS A SOLID SUBSTRATE



UNIVERSAL FINISH FILLER

UNIVERSAL REPAIR **FILLER**

FAST DRY UNIVERSAL FILLER

ALL PURPOSE FILLER

















High-quality, slow-setting, ready-to-use acrylic putty. Easy to apply and sand, it gives strong, durable surfaces. Ensures wall breathing. Recommended for smooth plastering.

APPLICATION:

Product intended for:

finishing and decorative works in construction | smoothing unevenness on concrete, cement-lime, gypsum-lime surfaces

Perfect as a primer for emulsion, acrylic and phthalic paints.

Efficiency: 0,5 m²/kg with a layer thickness of 1 mm.

PRODUCT FEATURES:



to apply



breathable

coating





after drving.

APPLICATION:

Product intended for:

filling irregularities, scratches, cracks, gaps and gaps in the substrate smoothing unevenness in concrete, cement-lime, gypsum-lime surfaces, etc.

High-quality acrylic putty. It gives white, smooth surfaces

with increased resistance to cracking. Very easy to process

Perfect for filling plasterboard joints and as a base for paints.

Efficiency: 0,5-0,7 m²/kg with a layer thickness of 1 mm.

PRODUCT FEATURES:



to apply





breathable coating

Product code: DMSNE

APPLICATION:

Product intended for:

very easy to apply.

filling and leveling internal cracks, gaps, scratches and voids in walls and ceilings | masking screws | grouting plasterboard joints, corner joints | filling joints around wooden and metal frames, etc.

Fast-drying, light putty with excellent adhesion to porous

substrates used in construction. Minimal shrinkage and no

cracking. Thanks to its light and delicate consistency, it is

For all standard construction substrates.

Efficiency: 0,3-0,7 m²/kg with a layer thickness of 1 mm.

PRODUCT FEATURES:



drying



interior & exterior



light



excellent

Product code: DMSSZL

High-quality, slow-setting, acrylic putty — flexible. Easy to apply and sand. Ensures wall breathing. When used externally, it is necessary to protect the surface with a good quality facade paint. Perfect as a base for acrylic, silicone and phthalic paints.

APPLICATION:

Product intended for:

filling unevenness, scratches, voids, furrows, cracked plaster, cracks, gaps and gaps in the substrate | smoothing unevenness in concrete, cement-lime, gypsum-lime and other typical substrates used in construction

Efficiency: 0,5-0,7 m²/kg with a layer thickness of 1 mm.

PRODUCT FEATURES:



flexible



interior & exterior



breathable coating



easy to apply

Product code: DMSUE	160 g	330 g	1,5 kg	5 kg	15 kg	
nr of pieces in a pack	15	6	4	1	1	
nr of items on a layer	450	240	80	24	11	
nr of items on a nallet	2250	1440	320	120	44	





900

fights mold fungi protects against resurgence cleans surfaces

APPLICATION:

Product is intended for:

combating and protecting against mold fungion walls and plasters that are exposed to high humidity

Efficiency: 3-4 m²/L.

PRODUCT FEATURES:



BIO-PROTECTIVE AGENTS

biocidal agent



interior & exterior



protects surface



chlorine

Product code: DSG	500 ml	1L	5 L
nr of pieces in a pack	10	6	1
nr of items on a layer	150	108	36
nr of items on a nallet	750	648	108

ALGAE AND MOSS REMOVER







fights algae, lichens and mosses facilitates surface renovation protects surfaces

APPLICATION:

Product intended for:

combating and securing against substrate destructive and disfiguring organisms | combating algae, mosses and lichens that create slippery surfaces | securing against their re-fouling | cleaning monuments and tombstones Facilitates renovation of wooden surfaces before applying color impregnations.

Efficiency: 16 m²/L.

PRODUCT FEATURES:



biocidal agent



interior & exterior



protects surface

Product code: DGL	500 ml	5 L
nr of pieces in a pack	10	1
nr of items on a layer	150	36
nr of items on a pallet	750	108

SUGAR SOAP

universal cleaning agent



Universal cleaner that is safe to use. Effectively and efficiently degreases and removes dirt. It does not damage the cleaned surfaces. It does not contain caustic soda. Cleans, degreases and prepares surfaces before painting.

APPLICATION:

Product intended for cleaning:

door | window frames | bathroom fittings | ceramic tiles | metal and plastic surfaces

PRODUCT FEATURES:



safe for surfaces



ready to use



indispensable during renovation

Product code: DMT	500 ml	5 L
nr of pieces in a pack	15	1
nr of items on a layer	150	36
nr of items on a pallet	900	108

RUST REMOVER

for steel and cast iron

FOSOL



Multifunctional remover based on phosphoric acid, designed to fight rust on steel and cast iron surfaces. Perfectly derusts and degreases the surface, and in addition preserves the cleaned surfaces, which prevents rust recurrence for a long

APPLICATION:

Product intended for: removing rust from steel and cast iron surfaces

It is also used to remove limescale and sediment from sanitary facilities.

PRODUCT FEATURES:



prevents

quick


in acting



ready to use



effectively



PAINT STRIPPER

PRE-PAINT WALL CLEANER

technical

HAND CLEANING PASTE



An excellent preparation for removing old paints and varnishes. It does not contain harmful methylene chloride and aromatics. Thanks to its consistency, it can also be used on vertical surfaces.

APPLICATION:

Product intended for:

removing paints and varnishes from metal, wood, plaster, glass and ceramics

Facilitates the removal of water-based adhesives from carpets and parquets.

PRODUCT FEATURES:



efficient



methylene chloride free



for vertical surfaces

Product code: DZFL nr of pieces in a pack 120



Product is intended for washing, degreasing and surface preparation before painting, cleaning work clothes after painting.

APPLICATION:

Product intended for:

washing | degreasing | preparation of walls, ceilings and facades before painting | cleaning of work clothes after painting scrubbing floors, terracotta, glaze, oil panels, PVC floor coverings, doors and windows after painting

Also used in horticulture and fruit farming as an additive to fungicidal liquids.

PRODUCT FEATURES:



EANING AGENT

effectively degreases



perfectly



indispensable during renovation





Excellent health and safety paste designed for intensive and gentle cleansing of soiled hands. Through high-quality and complex surfactants, the hand washing paste reliably and quickly cleans all medium and heavy soiling.

APPLICATION:

Product intended for:

washing very heavily soiled hands | removes grease, oil, soot and other dirt

PRODUCT FEATURES:



degreases



soapy





perfectly

Product code: DPBM	500 q
nr of pieces in a pack	8
nr of items on a layer	96
nr of items on a pallet	672

HAND CLEANING PASTE

sandy

HEAVY DUTY HAND SOAP



Product is intended for thorough hand cleansing. Designed for washing very heavily soiled hands. Thanks to sand particles, removes stubborn soiling such as paint, oil and brake dust. Perfect to use in places, where skin is in contact with substances which are difficult to clean.

APPLICATION:

Product intended for:

washing very heavily soiled hands removes grease, oil, soot and other dirt



Top quality, heavy duty hand cleaning soap containing polymeric abrasive. Will readily remove the heaviest ingrained grease and grime, quickly and efficiently. The addition of moisturisers provides the hands with added skin protection.

APPLICATION:

Product intended for: cleaning and caring for hands

Recommended for use in industrial plants, workshops for various types of mechanical, hydraulic, maintenance, etc. works.

PRODUCT FEATURES:



degreases



sandy



efficient



perfectly cleans

Product code: DPBP	500 g
nr of pieces in a pack	8
nr of items on a layer	92
nr of items on a pallet	672

PRODUCT FEATURES:



cient



hand moisturizing ingredients



neutral pH



effective for heavy soiling

Product code: DPR	200 g	500 g	1 kg
nr of pieces in a pack	6	8	4
nr of items on a layer	240	96	80
nr of items on a nallet	1440	677	370



DAY IN THE GARAGE?

IN THE EVENING NO ONE NEEDS TO KNOW





REMOVES
DIFFICULT AND
OILY STAINS

WOOD STAIN & VARNISH

quick-drying

Quick-drying Dragon Varnish is a high-quality protective and decorative product for wood protection both indoors and outdoors. The advanced 3-in-1 formula makes it an ideal choice for wood impregnation, giving years of colour and protection. Creaates satin coating, whitch protects wood against UV radiation and water. Thank to quick-drying formula first coating is dry to touch just after 20 min.

Efficiency: up to 15 m²/L.

AVAILABLE COLOURS:





FRAGRANCE

Product code: DLDS	200 ml	700 ml	2,5 L	5 L	
nr of pieces in a pack	6	6	1	1	
nr of items on a layer	300	72	35	20	
nr of items on a pallet	1800	648	175	80	

FINISH



EXCELLENT PROTECTION FOR YEARS





WOOD STAIN

decorative



An environmentally friendly product that does not contain harmful organic solvents. Perfectly colors any type of wood. It is a product based on high-quality urethane resin and pigments resistant to UV radiation. It emphasizes the grain pattern and brings out the natural beauty of wood.

Efficiency: about 15 m²/L.

APPLICATION:

Product intended for:

window frames | interior doors | furniture | paneling | paneling other decorative elements

AVAILABLE COLOURS:



AVAILABLE COLOURS:



WOOD STAIN

rustical



Product penetrates into the wood structure, permanently coloring the surface, emphasizing and strengthening the grain pattern. It allows you to even out the color of the substrate and mask the differences between shades.

Efficiency: 8-14 m²/L.

APPLICATION:

Product intended for:

decorative staining of wooden and wood-derived interior decorative elements

PRODUCT FEATURES:



emphasises the natural character of wood



interior



touch dry



solvents-free

Product code: ZBD	200 ml
nr of pieces in a pack	10
nr of items on a layer	300
nr of items on a pallet	2400



PRODUCT FEATURES:



apply with brush



interior



touch



emphasises the natural character of wood

Product code: DBR	200 ml	
nr of pieces in a pack	10	
nr of items on a layer	300	
nr of items on a pallet	2400	

WOOD PROTECTING PRESERVER

CONCENTRATE 1:9 KUPRAFUNG-P® BASIC



Liquid, indelible, water-soluble concentrate for the protection of wood and wood products against basidiomycetes causing wood decay and insects - wood pests (beetles).

APPLICATION:

For protection against wood-decaying fungi and insects - wood pests. For prophylactic protection of wood both indoors (use category 1 and 2) and outside (use category 3). Product for professional and general use. AVALIBLE COLOURS: brown, green

Biocidal products should be used with caution.

Please read the label and product information before each use.

PRODUCT FEATURES:

resistant to washing out

penetrating

deeply



interior & exterior



protects against insects and fungi

Product code: DIDK	1 kg	5 kg
nr of pieces in a pack	10	1
nr of items on a layer	110	39
nr of items on a pallet	480	117

PROFESSIONAL **WOOD PROTECTION**

IMPREGNATE:



BEAMS



ROOF TRUSSES



PERGOLAS



WOODEN LOGS



ELEVATIONS AND GATES

PROTECTION AGAINST DECAY OF WOODEN CONSTRUCTION POSTS OF:



PERGOLAS



FENCES



SWINGS



SUMMER HOUSES



BENCHES

FIREPROOF WOOD PRESERVER

CONTRENTRATE 1:6 KUPRAFUNG®-FLAME RATARDANT



A water-soluble concentrate based on modified, inorganic potassium compounds that protects wood against fire. Does not corrode steel. Lowers the freezing point of the working solution to -7°C. Properly secured wood, in accordance with the National Technical Assessment of ITB, is a non-combustible material.

APPLICATION:

Product is intended for fire protection of construction elements made of wood with a density of not more than 890 kg/m3 (excluding exotic wood), used outside and inside residential, commercial and public buildings, with a thickness of at least 16mm.

AVALIBLE COLOURS: transparent

PRODUCT FEATURES:



protects against fire

penetrating



interior



resistant to weather conditions

Product code: DIPK	1 kg	5 kg	20 kg
nr of pieces in a pack	1	1	1
nr of items on a layer	60	18	8
nr of items on a pallet	240	72	24

FIREPROOF WOOD **PRESERVER**

READY TO USE KUPRAFUNG®-FLAME RATARDANT



A water-soluble ready to use preserver based on modified, inorganic potassium compounds that protects wood against fire. Does not corrode steel. Lowers the freezing point of the working solution to -7°C. Properly secured wood, in accordance with the National Technical Assessment of ITB, is a non-combustible material.

APPLICATION:

Product is intended for fire protection of construction elements made of wood with a density of not more than 890 kg/m3 (excluding exotic wood), used outside and inside residential, commercial and public buildings, with a thickness of at least 16mm.

AVALIBLE COLOURS: transparent, brown, green

PRODUCT FEATURES:



protects against fire



interior & exterior



Product code: DIPG

FIRE, MAKING IT NON-FLAMMABLE **EFFECTIVELY PROTECTS WOOD**



AGAINST

AGENT FOR PROTECTING **WOOD AGAINST DECAY**

READY TO USE



Bitumen emulsion to protect wood against decay. When applied to wood, it forms a waterproofing layer that protects wood from moisture penetration and aggressive substances in the soil. Due to its high dry matter content of more than 55%, it guarantees the formation of a strong protective coating.

APPLICATION:

For securing wooden posts from the construction of fences, swings, benches, pergolas and fences and flowerbeds.

AVALIBLE COLOURS: black

Please read the label and product information before each use.

PRODUCT FEATURES:



resistant to washing out





deeply penetrating



weather conditions

Product code: DSODPP	1 kg	3 kg
nr of pieces in a pack	4	1
nr of items on a layer	48	25
nr of items on a pallet	288	75



SHED & FENCE PRESERVER

MATT FINISH







A non-biocide protective and decorative impregnation for wood. It gives the wood a matte, colorful finish while maintaining the visible structure of the rings. It contains precious waxes.

Efficiency: to 10 m²/L.

APPLICATION:

Product intended for:

painting smooth wood, used outdoors and indoors: fences, gazebos, etc.

PRODUCT FEATURES:




apply with brush

emphasises

the natural



interior & exterior



prevents the biodegradation of wood

	Product code: DIADP	1 L	5 L	10 L
	nr of pieces in a pack	4	1	1
	nr of items on a layer	80	18	11
. [nr of items on a pallet	320	72	44



Biocides-free

Organic solvents-free

Contains hydrophobic waxes

Creates a matte coating

High resistance to weather conditions

Up to 4 years of protection

Very good coverage





LINSEED OIL VARNISH

for wood



Natural product based on concentrated linseed oil, with the addition of substances accelerating drying, intended for impregnation of wood. It protects the wood against water and adverse weather conditions.

APPLICATION:

Product intended for:

impregnation of raw wood and wood-derivative materials: doors, windows, furniture, fences, gazebos, pergolas, greenhouses, summer houses, gates, balustrades, garden furniture, paneling, etc.)

Also for priming mineral plasters and other porous substrates before painting topcoat with oil or phthalic paint. Efficiency: 10 m²/L..

PRODUCT FEATURES:



protects from external factors



interior & exterior



with brush



emphasises the natural character of wood

Product code: DPL	750 ml	5 L	
nr of pieces in a pack	8	1	
nr of items on a layer	56	20	
nr of items on a pallet	560	80	

LINSEED OIL VARNISH

WOOD **VARNISH**



metal can	Type of packaging	metal can
colorless / yellow	Color	colorless / white
characteristic "oily"	Smell	dispersive
linseed oil	Raw material / polymer base	acrylic dispersion
wood, wood-based materials, mineral plasters, other types of porous substrates	Type of substrate	wood
doors, windows, furniture, fences, gazebos, pergolas, greenhouses, summer houses, gates, balustrades, garden furniture, paneling	Application areas	floors, paneling, doors, decorative moldings
brush, roller, cloth	Application method	brush or roller for polyurethane varnishes
absence	Gloss level	gloss / matt
+10°C to +30°C	Temperature range in which work can be carried out	+15°C to +30°C
10 m ² /L	Efficiency [depending on the type and absorbency of the substrate, with one painting]	10-12 m ² /L
0,93±0,02	Density in +20°C [g/cm³]	1,03±0,01
approx. 30 min	Drying time	approx. 4-5 h
oil-phthalic thinner, balsamic turpentine	Dilution	ready to use
do not contain	Organic solvent content	do not contain
yes	Deep ground penetration	no
not applicable	Abrasion resistance	yes
not applicable - the oil does not form a protective coating but penetrates into the wood	Scratch, impact and stain resistant	resistant
no	Waterproof	yes
yes	Moisture resistance	yes
no	Frost resistance	yes

WOOD VARNISH

acrylic-polyurethane



DELICATE GLOSS / MATT

Thanks to its high efficiency and very good application properties, it is ideal for painting large surfaces. The resulting coating is characterized by hardness and abrasion resistance.

APPLICATION:

Product intended for:

painting wooden elements, i.e. floors, paneling, balustrades, doors, decorative strips, plinths

The obtained coating is characterized by very high durability, which is especially recommended for painting surfaces in intensively used areas.

Efficiency: 10-12 m²/L.

PRODUCT FEATURES:



colorless



high abrasion



interior



easy application

Product code: DLPD 200 ml 500 ml 750 ml 3 L
nr of pieces in a pack 3 12 6 1
nr of items on a layer 600 120 72 24
nr of items on a pallet 1800 600 648 120

WOOD FILLER



Ready-to-use, plastic mass intended for the renovation of wood and wood-based materials. The paste consistency allows easy application and smoothing. After hardening, it has properties similar to the wood itself.

Efficiency: 1,4 m²/kg.

APPLICATION:

Product intended for:

filling cracks and cavities in wood sealing holes and gaps in the parquet, paneling repair of furniture, doors

PRODUCT FEATURES:



available in many colors



properties similar to the wood



AVAILABLE COLOURS:



















ASH

DARK OAK

AVAILABLE COLOURS:

WHITE

LIGHT WOOD



DARK WOOD



EXOTIC WOOD



QUICK-DRYING WOOD FILLER



Putty for wood - ready to use, perfect for a customer who cares about comfort and a quick result. Designed to fill cracks and cavities in wood. The cannula ensures precise application even on vertical surfaces.

Efficiency: 1,4 m²/kg.

APPLICATION:

Product is intended for joining: filling cracks and cavities in wood sealing holes and gaps in the parquet, paneling repair of furniture, doors

PRODUCT FEATURES:



drying 30 time



interior & exterior




for vertical surfaces



can be drilled, screwed or planed

Product code: DMSDS	150 g
nr of pieces in a pack	15
nr of items on a layer	450
nr of items on a pallet	2250





	WOOD FILLER	QUICK-DRYING WOOD FILLER	WOOD HARD PUTTY
Capacities available	250 g	150 g	40 g, 250 g, 620 g
Package types	plastic can	plastic tube	blister, metal can
Raw material	water-dilutable	water-dilutable	solvent
Drying time (1 layer)	2 h	30 min.	15 min.
Cavity size (1 layer)	1-3 mm	1-3 mm	1-3 mm
Use	inetrior	inetrior	inetrior
The amount of colors	11	4	1
Possibility of processing	yes	yes	yes
Cover possible	yes	yes	yes
Resistance to mechanical damage	average	good	high
Application	with spatula or knife	with spatula or knife	with spatula or knife
Smell	gentle	gentle	intensive
Picture of the packaging	WOOD FILLER 85% CONTAINS UP TO PAINTABLE WHEN DRY QUICK DRYING CAN BE DRILLED, SCREWED OR PLAN	WOOD WOOD WOOD FILLER CUICK DRYNG CUICK DR	WOOD HARD PUTTY PU

WOOD HARD PUTTY

polyvinyl





A ready-made product that is used for the renovation of all types of wood and wood-based materials, in places particularly exposed to mechanical damage. It provides high resistance to external factors, therefore it is recommended for use in places exposed to weather conditions and damage.

APPLICATION:

Product is intended for filling:

window frames | parquet floors | panels | paneling | external stairs | external doors | terrace boards | wooden cladding

Also used to level minor irregularities of wooden and woodbased surfaces before painting.

Efficiency: 1,25m²/kg with a layer thickness.

PRODUCT FEATURES:



waterproof



interior & exterior



drying time



grindable and paintable

Product code: DKDD	40 g	250 g	620 g
nr of pieces in a pack	10	6	12
nr of items on a layer	360	252	120
nr of items on a pallet	2520	1512	600

EPOXY RESIN

two-component

INFINITE



A two-component epoxy composition with a universal spectrum of action. Creates a clear, colorless coating with excellent smoothness, high gloss and high abrasion resistance. Perfect adhesion to most surfaces.

APPLICATION:

AND DECORATION

Product intended for:

production of solvent-free coatings | laminates (also with the addition of glass fiber or sand) | decorative objects | art work | preparation of anti-corrosion putties and putties strengthening and protecting concrete against dusting | use as a waterproofing agent | use as the final protective layer

PRODUCT FEATURES:



high abrasion resistance



interior

& exterior



high



can be

Product code: DZYE	750 g
nr of pieces in a pack	4
nr of items on a layer	60
	F 10







POSSIBILITIES

HEAT-RESISTANT PAINT

silicone



The hardened coating is temperature resistant up to +600°C. It does not turn yellow or peel off under the influence of high temperatures. It is highly impact and weather resistant.

APPLICATION:

Product intended for:

painting of metal surfaces (except copper, brass and bronze) exposed to high temperatures painting stoves, housings of fireplaces, heating elements, elements of the exhaust system of cars (silencers and exhaust pipes)

AVALIBLE COLOURS: silver, black

PRODUCT FEATURES:



impact resistant



interior & exterior



waterproof



Product code: DSZ	200 ml	500 ml	750 ml	5 L	Product code: DSZ	200 ml	500 ml
nr of pieces in a pack	12	12	8	1	nr of pieces in a pack	12	12
nr of items on a layer	252	120	56	variable	nr of items on a layer	252	120
nr of items on a pallet	1512	720	560	105	nr of items on a pallet	1512	720

METAL HARD PUTTY

polyvinyl





Product characterized by a short drying time and excellent adhesion to the substrate. After drying, it creates a very hard, completely waterproof, mat surface that is easy to sand and paint.

APPLICATION:

Product is intended for filling: cracks | slots | holes

It is also used for leveling minor irregularities on metal surfaces, as well as for leveling scratches, depressions and unevenness before applying primers.

PRODUCT FEATURES:



paintable and sandable



interior & exterior





waterproof

Product code: DKDM	40 g	250 g	620 g
nr of pieces in a pack	10	6	12
nr of items on a layer	360	252	120
nr of items on a pallet	2520	1512	600

DECORATIVE VARNISH

silver/ golden/ copper/ black



High-performance, quick-drying gold decorative varnish. The painted surface is resistant to weather conditions.

APPLICATION:

Product is intended for decorative painting on: glass | paper | skin | wood | metal | tombstones | holiday decorations

PRODUCT FEATURES:



drying time



interior & exterior **AVAILABLE COLOURS:**

GOLDEN



SILVER




COPPER



BLACK



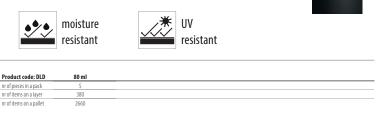



HARD CLEANER

TECHNICAL REMOVER AND DEGREASER

IPA CLEANER

ISOPROPANOL FLECTRONICS CLEANER

MULTI CLEANER

HOUSEHOLD CLEANER



IPA CLEANER
IZOPROPANOL
CI NOTULICEZA
TENNIC ROB OPTICAL PRINTS
THORAGON TO THE PRINTS
THORAGON TO THE PRINTS
THE PRINTS TO THE



PAINTS, VARNISHES AND CLEANERS IN AEROSOL Specialized product that perfectly removes various types of deposits and stubborn oil- and grease-based dirt without leaving any residue. The best way to prepare surfaces for assembly and repair work, for workshop and industrial use.

APPLICATION:

Perfect for preparing parts before assembly of clutches, brake discs, gearboxes and other devices exposed to grease, oil and fresh industrial dirt. Indispensable for maintenance work.

Product designed to clean electronic equipment, optical elements and precision mechanics. Effectively degreases, removes dirt and permanently excludes moisture. Convenient to use, it evaporates quickly leaving no residue on the surface.

APPLICATION:

Product is intended for cleaning the optics of: telescopes, binoculars, spotting scopes, magnifying glasses, camera lenses and night vision devices, precision mechanics devices, parts of electronic devices, mechanisms and AV heads, CD / DVD / Blu-ray laser readers.

A versatile spray for the effective removal of stubborn dirt. Easy to use, does not damage delicate surfaces and does not cause corrosion. Leaves a pleasant citrus scent.

APPLICATION:

Product is intended for removing the remains of uncured adhesives, tar, fats, resins, waxes, silicone oils, shoe polish, old stickers and chewing gums. Has a wide range of applications, e.g. on textiles, carpets, glass, metal, plastic and coated surfaces. Can also be used to clean tools and equipment of all kinds. Removes: stickers, chewing gum, residues of uncured adhesives, greasy dirt.

PRODUCT FEATURES:



evaporates quickly



innovative valve 360°



removes oil, grease, brake fluid



highly effective

Product code: DHCZOT	400 ml
nr of pieces in a pack	6
nr of items on a layer	174
nr of items on a nallet	1044

PRODUCT FEATURES:



Product code: DICISCE

nr of items on a laver

evaporates quickly

permanently

174

1044

moisture



innovative valve 360°



highly effective ک

valve 360°

innovative



leaves a pleasant, citrus scent

and effective

PRODUCT FEATURES:



 Product code: DMZG
 400 ml

 nr of pieces in a pack
 6

 nr of items on a layer
 174

 nr of items on a maller
 1044

QUICK AIR



Blasts dust and dirt particles from hard-to-reach places. Perfect for cleaning precision mechanisms. The special valve guarantees functionality in any position, and the applicator tube enables precise application of the product.

APPLICATION:

In the valve up position, a strong stream of compressed air blows dust out of hard-to-reach places, while when the package is turned 180 ° with the valve down, it acts as a freezer, making it easier, for example, to assemble small tightly fitting components or detect damage in electronic components.

PRODUCT FEATURES:



fast and effective



freezing function



safe for electronics



versatile use

Product code: DQASP	400 ml
nr of pieces in a pack	6
nr of items on a layer	174
nr of items on a pallet	1044





ANTI-CORROSION ENAMEL ZINC

ANTI-CORROSION ENAMEL ALU-ZINC

HEAT RESISTANT ENAMEL

MARKING PAINT





Anticorrosive zinc enamel intended for the protection of steel and cast iron elements. The unique formula creates a durable, opaque coating with very good adhesion to the substrate.



Acrylic paint intended for marking on trees, roads and various types of installations. The increased amount of pigment allows you to make all kinds of inscriptions. Irreplaceable in geodetic, earth, installation, archaeological and opencast works.

decorative inscriptions | ads | warning signs | ads on cars

AVAILABLE COLORS: orange, pink, green, yellow

APPLICATION:

Product intended for:

protective, decorative and renovation coating of galvanized, spray-galvanized steel surfaces or primed with anticorrosion zinc paint

Enamel intended for decorative, renovation and protective painting of steel and galvanized surfaces. A special formula

provides a durable, anti-corrosive coating resistant to high

temperatures. Perfect for construction and industry.

APPLICATION:

Product intended for:

anticorrosive protection of steel and cast iron elements corrections and repairs of damaged paint coatings

It can be used as a primer for DRAGON topcoat enamels.

APPLICATION:

weather conditions.

Product is intended for painting:

furnaces | heaters | spit | boilers | pipes and all kinds of surfaces exposed to high temperatures

Professional heat-resistant enamel for covering surfaces

exposed to high temperatures. The modern formula

quarantees very good coverage and high resistance to

AVAILABLE COLORS: anthracite, red, white, black, aluminum

Efficiency: 1,5-2 m²/400 ml.

PRODUCT FEATURES:



drying



resistant to impacts and scratches



resistant to hiah temperatures

<u>'</u>	to fa

external ctors

Efficiency: 1,5 - 2 m²/500 ml.

PRODUCT FEATURES:

fast

drying



& exterior

interior



APPLICATION:

Product is intended for:

excellent coverage

Product code: DFZF	500 ml
nr of pieces in a pack	6
nr of items on a layer	150
nr of items on a pallet	1350

Efficiency: 1,5 - 2 m²/400 ml.

PRODUCT FEATURES:



drying



anti-corrosion coating





resistant to high temperatures

Product code: DEAC	400 ml
nr of pieces in a pack	6
nr of items on a layer	150
nr of items on a pallet	1350

Efficiency: 1,5-2 m²/400 ml. **PRODUCT FEATURES:**

drying



Product code: DEAAC

nr of pieces in a pack

nr of items on a palle





anti-corrosion coating



150





Product code: DEZS 400 ml 150 nr of items on a nallet

FLUORESCENT VARNISH

UNIVERSAL ENAMEL

ENAMEL FOR HEATERS

ANTICORROSION PAINT

underlay



universal @ universal @ universal @

Universal, quick-drying spray paint. The unique

composition of the raw material guarantees high

durability, color repeatability and surface uniformity.

metal surfaces | plastics | wood | plaster | plaster | body

AVAILABLE COLORS: copper, gold and RAL colors: 6018, 6029,

6002, 6005, 0000, 9003, 9003 gloss, 1001, 3002, 3003, 3004,

8011, 4003, 4005, 5015, 5010, 5002, 1018, 7035, 7001, 7016, 9011,

Increases the surface resistance to external factors.



Varnish for marking hazardous items and for information and warning signs. The unique formula ensures perfect adhesion to painted surfaces and a durable and intense color.

APPLICATION:

Product intended for:

decorative and protective coating of surfaces made of steel, metal, iron, stone, ceramics, concrete, wood painting for warning purposes (signs, inscriptions, markers of dangerous places, etc.)

AVAILABLE COLORS: orange, green, yellow

Efficiency: $1.5 - 2 \text{ m}^2/400 \text{ ml}$.

PRODUCT FEATURES:

fast drying



resistance to external



excellent coverage



anti-corrosion coating

PAINTING AND

PREPAIF

resistant

APPLICATION:

sheets furniture etc.

Product is intended for painting:

9017 gloss, 9006, 1023, 2004, 3020

Efficiency: to 2 m²/400 ml.

PRODUCT FEATURES:

fast

drying



consistency of colors



interior & exterior

Product code: DEU nr of pieces in a pack 150 nr of items on a naller

Enamel protects painted surfaces against corrosion and mechanical damage, creating a smooth, hard, nonyellowing coating resistant to temperatures from -20°C to + 100°C.

APPLICATION:

Product intended for:

surface painting of radiators, hot water tanks, central heating pipes and other heating elements made of steel, cast iron, aluminum and copper alloys

Efficiency: to 1,2 m²/400 ml.

PRODUCT FEATURES:



fast drying



not turn vellow



Product code: DEALG

nr of pieces in a pack

nr of items on a pallet

excellent

150



thermal resistant

Professional, quick-drying acrylic paint intended for paint corrections and maintenance of vehicles and machines. The product provides excellent adhesion of topcoat paints and enamels.

APPLICATION:

Product intended for:

anticorrosive protection of steel and cast iron elements painting of new machines, industrial structures, fences, barriers, etc. and their renovation

AVAILABLE COLORS: white, black, red, grev Efficiency: to 3 -5 m²/400 ml.

PRODUCT FEATURES:



fast drying



paint



excellent coverage



interior & exterior

Product code: DFAP nr of pieces in a pack nr of items on a naller





CHROME VARNISH

METALLIC VARNISH

EPOXY VARNISH

ACRYLIC CAR VARNISH

Underlay



A quick-drying varnish designed for craft and decorative works. Due to the high content of precious pigments, it gives the painted surfaces a chrome effect with a beautiful gloss. The special formula provides excellent coverage, high efficiency and excellent adhesion.

APPLICATION:

Product intended for:

decorative coating of various surfaces, e.g. metal, wood, glass, some plastics, stone, ceramics, concrete, e.g. sculptures, frames

AVAILABLE COLORS: copper, silver, gold

Efficiency: to 2 m²/400 ml.

PRODUCT FEATURES:



drying



waterproof



coverage



excellent

Product code: DLC	400 ml
nr of pieces in a pack	6
nr of items on a layer	150
nr of items on a pallet	1350



Quick-drying varnish with a metallic decorative effect, intended for decorative and protective varnish. Due to the high content of precious pigments, it gives painted surfaces a metallic effect with a beautiful gloss.

APPLICATION:

Product intended for:

decorative and protective coating of surfaces made of steel and metal home repair work in car workshops for hobby work, etc.

AVAILABLE COLORS: black, red, blue, silver, green

Efficiency: up to 2 m²/400 ml.

PRODUCT FEATURES:



resistant



excellent coverage





fast drying

Product code: DLM	400 ml	
nr of pieces in a pack	6	
nr of items on a layer	150	
nr of items on a nallet	1350	



High-quality varnish for decorative painting of white surfaces. The modern formula quarantees a well-covering, hard coating with a high degree of whiteness, resistant to scratching, cracking and abrasion.

APPLICATION:

Product intended for:

decorative and protective varnishing of enamelled and ceramic surfaces | painting and renovation of household appliances, i.e. bathtubs, washbasins, sinks, refrigerators, etc.

AVAILABLE COLORS: white Efficiency: up to 2 m²/400 ml.

PRODUCT FEATURES:



crack resistant



waterproof



high



excellent coverage

Product code: DLE	400 ml
nr of pieces in a pack	6
nr of items on a layer	150
nr of items on a pallet	1350



Professional, quick-drying acrylic varnish intended for paint corrections and maintenance of vehicles and machines. The modern formula creates a durable coating with high resistance to external factors, impacts and scratches.

APPLICATION:

Product intended for:

making paint corrections | vehicle maintenance | machine maintenance

AVAILABLE COLORS: aluminum, white gloss, black matt, black gloss, colorless

Efficiency: up to 2 m²/500 ml.

PRODUCT FEATURES:



AUTOMOTIVE

drying time





waterproof



excellent coverage

Product code: DLAA	500 ml
nr of pieces in a pack	6
nr of items on a layer	150
nr of items on a pallet	1200

ACRYLIC CAR VARNISH WHEEL

ACRYLIC CAR-BUMPER VARNISH

ANTI-CORROSION CAP-PRIMER VARNISH

UNDERBODY COATING AUTO-BITUM



Professional, quick-drying acrylic lacquer designed for rims, hubcaps and other items of this type. High-quality acrylic lacguer with a metallic effect for the lacguering and maintenance of steel components.

APPLICATION:

Product intended for:

varnishing of rims | maintenance of rims, hubcaps, frames, strips and other similar steel elements

AVAILABLE COLORS: silver, black

Efficiency: up to 2 m²/500 ml.

PRODUCT FEATURES:



waterproof

coating

anti-corrosive





excellent





High-quality acrylic lacguer designed for professional use in car painting, bodywork protection and painting plastic bumpers.

APPLICATION:

Product intended for performing paint corrections and maintenance of bumpers and spoilers in vehicles

AVAILABLE COLORS: black

Efficiency: up to 2 m²/500 ml.

PRODUCT FEATURES:



fast drying





waterproof



excellent coverage

Product code: DLAAZ	500 ml
nr of pieces in a pack	6
nr of items on a layer	150
nr of items on a nallet	1200



Anticorrosive undercoat intended for professional use in car painting. The unique formula provides a hard and flexible coating, resistant to impacts, scratches and weather conditions.

APPLICATION:

Product intended for carrying out paint corrections and maintenance of vehicles and machines

AVAILABLE COLORS: white, red, grey

Efficiency: up to 2 m²/500 ml.

PRODUCT FEATURES:



resistant



excellent



smoothes out irregularities



reduces discoloration

Product code: DLAAP	500 ml
nr of pieces in a pack	6
nr of items on a layer	150
nr of items on a pallet	1200



Insulating, high-build bitumen based asphalt. Designed for maintenance of the chassis, wheel arches and other similar places. A special formula creates an anti-corrosive, flexible, waterproof coating with high resistance to environmental influences.

APPLICATION:

Product intended for:

protection of vehicle chassis against corrosion and impacts from small stones and gravel protection of wooden, metal and concrete elements operated in difficult conditions

AVAILABLE COLORS: black Efficiency: up to 2 m²/500 ml.

PRODUCT FEATURES:



impact resistant





waterproof



excellent coverage

ıct code: DSKPAB	500 ml	
pieces in a pack	6	
tems on a layer	150	
tems on a pallet	1200	

DESCALER

GROAT REVIVER

CAUSTIC SODA



Extends the life of household appliances, prevents increased consumption of electricity. It does not corrode





Product intended for:

removing limescale from household appliances and surfaces on which limescale builds up









PRODUCT FEATURES:



perfect descaling



perfectly removes sediment



protects household appliances



instantly

Product code: DOK	30 g
nr of pieces in a pack	15
nr of items on a layer	1020
nr of items on a nallet	8160



WHITE

Product characterized by a high degree of coverage, high abrasion resistance and very good adhesion to cement and lime joints. It is waterproof and can be colored to change the color of the joint.

APPLICATION:

Product intended for:

refreshing lime joints, wall and floor coverings made of ceramic tiles (glazed tiles, terracotta, clinker, stoneware, porcelain mosaics, etc.) renewing and unifying the colors of old, faded, dirty joints | color changes to new or old joints

Efficiency: 12 - 16 m²/120 ml.

PRODUCT FEATURES:



waterproof

120 ml

10 variables



drying



roduct code: DRF

r of pieces in a pack

can be dyed



Easy-to-use agent containing 100% sodium hydroxide in the form of flakes or granules. An excellent agent for the chemical unblocking of pipes and siphons in sewage systems.

APPLICATION:

Product intended for:

unblocking sewer pipes | removing blockages in clogged sinks, drain holes, siphons | automatically removes solid and organic impurities from pipes and siphons (grease, hair, paper, cotton wool, kitchen waste)

In the form of an aqueous solution (10-30%), it is a component of various cleaning fluids.

PRODUCT FEATURES:



instant effect



eliminates odour



cuts through standing water



effective

Product code: DSK	250 g	500 g	1 kg
nr of pieces in a pack	20	16	6
nr of items on a layer	300	variables	96
nr of items on a pallet	2400	1152	480



HOUSEHOLD CHEMISTRY

TECHNICAL

CHEMISTRY

AND AUTOMOTIVE







works

P
n
n

HYDROCHLORIC ACID 30%

SODIUM WATER

BRUSH CLEANER

AMMONIA WATER



SODIUM

AMMONIA WATER

Non-flammable product. Transparent corrosive liquid with an irritating odor.

An excellent addition to construction mortars. Protects against moisture and fire. It can also be used as a washing accessory.

Efficient preparation for cleaning brushes and tools after working with solvent-based products and painting.

Aqueous ammonia solution containing 25% ammonia.

APPLICATION:

Product is intended for use:

for regeneration of ion exchangers | in the production of organic dyes, plastic masses for cleaning metal surfaces for the extraction of metal ores | for the preparation of zinc and zinc sheet before brazing for etching metal surfaces, cleaning concrete and ceramics from cement residues

APPLICATION:

Product intended for:

fire-retardant impregnation of wood and fabrics insulation against moisture and water penetration of concrete structures (wells, septic tanks, retaining walls, etc.) as an additive increasing the setting speed of the concrete mix | as a setting accelerator for metallurgical cement 250

APPLICATION:

Product intended for:

washing brushes, tools after painting, puttying and other iobs with solvent-based products

APPLICATION:

Product intended for:

removing raids of verdigris, tar, silver oxide, rust from all kinds of metals | neutralization of acid residues | cleaning and degreasing of galvanized sheets before painting

PRODUCT FEATURES:



multiple applications



colourless

Product code: DKWS	500 ml	5 L	
nr of pieces in a pack	8	1	
nr of items on a layer	120	40	
nr of items on a pallet	720	120	

PRODUCT FEATURES:



moisture protection



protection



roduct code: DSWS	500 mITW	5 L	20 L
r of pieces in a pack	15	1	1
r of items on a layer	150	36	12
r of itoms on a nallot	000	100	2/

PRODUCT FEATURES:





perfectly



works instantly

Product code: DPCP	500 ml
nr of pieces in a pack	20
nr of items on a layer	variables
nr of items on a pallet	960

PRODUCT FEATURES:



effective



certificate



multiple applications

Product code: DWA	500 ml
nr of pieces in a pack	8
nr of items on a layer	120
nr of items on a pallet	720

GRAPHITE GREASE

LITHIUM GREASE ŁT 43

MACHINE GREASE

TECHNICAL ACID-FREE VASELINE





Extends the service life of devices, materials and protects them against corrosion. It serves as a means of reducing friction between the mating surfaces of machines and devices.

APPLICATION:

Product intended for lubrication: friction knots open gears worm gears threads screws chains e.t.c.

ŁT43 lithium grease based on mineral oil, lithium compounds and enriching additives. Serves to reduce friction between the mating surfaces of machines and devices.

APPLICATION:

Product intended for: rolling and friction bearings of machines of the hinge locks threads chains

Product characterized by excellent lubricity. Extends the service life of devices, materials and protects them against corrosion.

APPLICATION:

Product intended for lubrication: rolling and friction bearings of machines of hinges locks threads chains

Acid-free technical petroleum jelly is a high-purity, viscous anti-corrosive lubricant designed to protect the surface. Designed for lubrication of precision mechanisms such as locks, padlocks, hinges, tools and various types of machines.

APPLICATION:

Product intended for:

protection of metal elements against corrosion | oiling of leather, plastic and rubber products | fusing luggage and door anti-freeze seals to each other | lubrication of contacts and electrical connections, battery terminals, screw connections, guides, etc. as protection against weather conditions

PRODUCT FEATURES:



AUTOMATIVE CHEMISTRY




waterproof



thermal resistant



anti-corrosion protection



PRODUCT FEATURES:



efficient



resistant to salt water



extends the life of the device



anti-corrosion protection

Product code: DSL	50 ml
nr of pieces in a pack	25
nr of items on a layer	1000
nr of itoms on a nallet	5000

PRODUCT FEATURES:



efficient



anti-corrosion protection



extends the life of the device

Product code: DSMT	50 ml
nr of pieces in a pack	25
nr of items on a layer	1000
nr of items on a nallet	5000

PRODUCT FEATURES:





excellent



extends the life of the device



Product code: DWT	DWT	
nr of pieces in a pack	25	
nr of items on a layer	1000	
nr of items on a pallet	5000	63

ROAD SALT

SUMMER WINDSHIELD WASHER

WINTER WINDSHIELD **WASHER**







The coarse-crystalline product ensures a longer working time due to slower dissolution. The use of an anti-caking agent ensures that DRAGON's "road salt" is always loose. Effectively dissolves snow and ice.

Ready-to-use summer windshield washer fluid with a lemon scent. Quickly and effectively removes dirt without leaving streaks. It restores perfect visibility.

Ready-to-use winter windshield washer fluid with a pleasant sea scent. Quickly removes typical winter dirt, restoring perfect visibility without streaks. It prevents window-icing on frosty days.

APPLICATION:

Product intended for:

defrosting and anti-icing roads, sidewalks, parking lots and other communication routes

APPLICATION:

Product intended for:

washing car windows and headlights, including plastic and xenon headlights

APPLICATION:

Product intended for:

washing car windows and headlights, including plastic and xenon headlights

PRODUCT FEATURES:



defrosts communication



dissolves snow and ice



Product code: DSDR nr of pieces in a pack

nr of items on a nallet

combats surface slipperiness



always free flowing

PRODUCT FEATURES:



pleasant smell



perfectly



leaves no streaks

Product code: DPSL nr of pieces in a pack nr of items on a pallet

PRODUCT FEATURES:



pleasant smell



leaves no streaks



freezing point below -20°C



perfectly

Product code: DPSZ	4 L
nr of pieces in a pack	1
nr of items on a layer	48
nr of items on a pallet	144



DEFROSTER



It works effectively even at very low temperatures without leaving the scratches on glass surfaces caused by traditional scrapers. It is harmless to wiper blades, rubber seals and paint. Easy to use thanks to the spray bottle.

APPLICATION:

Product is intended for removing ice, frost and snow: from the outer surfaces of car windows | headlights | mirrors | rubber | seals | locks

PRODUCT FEATURES:



pleasant smell



dissolves snow and ice



effective



easy application





DF-04 PHTHALY-CARBAMIDE SOLVENT

DC-01 NITRO **SOLVENT**

SILICONE CLEANER degreaser









. 0 0 0 1 0 0 0 1 0 0 0

AUTOMOTIVE CHEMISTRY

A professional product to be used in a sheet metal shop and paint shop. Used to dilute carbamide-phthalic products to working viscosities.

A professional product to be used in a sheet metal shop and paint shop. Used to dilute nitrocellulose products such as paints, enamels, varnishes.

A solvent composition used for cleaning and degreasing surfaces.

APPLICATION:

Product intended for:

diluting phthalic carbamide products to working viscosities cleaning tools, brushes and other dirty elements after painting

APPLICATION:

Product intended for:

dilution of nitrocellulose products to working viscosities cleaning tools, brushes and other dirty elements after painting

It can be used as a varnish remover.

APPLICATION:

Product intended for:

dissolving resins | removing contaminants such as: silicones, oils, fats, greases, tar, asphalt from all surfaces

It can be used as a remover before applying a primer, varnish or after sanding.

PRODUCT FEATURES:



many





Product code: VRFKDFK	500 ml	5 L
nr of pieces in a pack	20	1
nr of items on a layer	160	36
nr of items on a nallet	960	10.8

PRODUCT FEATURES:







Product code: VRNDC	500 ml	5 L
nr of pieces in a pack	20	1
nr of items on a layer	160	36
nr of items on a pallet	960	108

PRODUCT FEATURES:



many





Product code: VZSO	1 L
nr of pieces in a pack	12
nr of items on a layer	72
nr of items on a pallet	432

SEAL SEALING MASS

GLASS MAT

FIBERGLASS PUTTY

FINISH PUTTY



A solvent-based product for joints and lap joints that hardens by evaporation. After hardening, it does not crack and is an ideal water and moisture barrier. Creates a durable layer resistant to water, gasoline and oils.

APPLICATION:

Product intended for:

sealing of flanged metals or welds in the front and rear parts of the car body, the boot compartment, the floor and the inner part of the floor plate

Can be applied with a brush or spatula.



The glass mat is made of chopped strands of glass fiber arranged randomly, glued together with an emulsion binder. It is characterized by good quality and softness, which allows for the formation of any shapes and forms.

APPLICATION:

Product intended for repairs of:

fenders and car doors perforations and cracks in boats, tanks

Available in two weights: 300 g/m² and 150 g/m²



A two-component product with glass fiber, characterized by high hardness and low flexibility. Easy to apply and process. It has good adhesion to various surfaces and very high mechanical strength.

APPLICATION:

Product intended for:

filling cavities | strengthening of areas affected by corrosion after prior cleaning | as a base for subsequent layers of another surface leveling putty

Not for direct use on galvanized steel.

AS TIV

A two-component, micro-fine polyester putty. It is easy to process and has very good adhesion to galvanized steel. After sanding, it gives a perfectly smooth surface.

APPLICATION:

Product intended for:

repair of small areas | final leveling of small defects and scratches caused by the application of filling putty leveling minor scratches on painted surfaces, without the need to use filling

PRODUCT FEATURES:



waterproof



with brush or spatula

Product code: VMPU	1L	
nr of pieces in a pack	12	
nr of items on a layer	108	
nr of items on a pallet	648	

PRODUCT FEATURES:



resistant to external factors





resistant to high temperatures

Product code: VMASZ	150 g/m ²	5 m	Product code: VMASZ	300 g/m ²	5 m
nr of pieces in a pack		20	nr of pieces in a pack		15
nr of items on a layer		240	nr of items on a layer		180
nr of items on a pallet		2160	nr of items on a pallet		1620

PRODUCT FEATURES:



durable



very good

Product code: VSZFW	250 g	500 g
nr of pieces in a pack	8	8
nr of items on a layer	112	120
nr of items on a pallet	2016	960

PRODUCT FEATURES:



flexible



very good

Product code: VSZF	250 g	500 g
nr of pieces in a pack	8	8
nr of items on a layer	112	120
nr of items on a pallet	2016	960

UNIVERSAL PUTTY

CAR BODY CARE AGENT

REPAIR KIT

POLYESTER REPAIR RESIN









The product is characterized by a fine-grained consistency and low elasticity. It creates a relatively hard coating with good adhesion to both primed and non-primed surfaces. It is easy to apply and sand.

APPLICATION:

Product intended for filling unevenness and small defects in:

steel | polyester laminates | aluminum | two-component acrylic undercoats epoxy primers

The agent is based on high-quality synthetic resins and does not contain bitumen and asphalts. It has soundproofing properties. After drying, the layer is flexible and resistant to mechanical damage. It can be covered with any topcoat.

APPLICATION:

Product intended for:

car body protection | securing sills, wheel arches, spoilers and other elements against stone impact, water, salt and The kit consists of a fiberglass mat, polyester resin and a hardener. It has excellent adhesion to the substrate. The hardened surface is resistant to water, gasoline, oils, greases and short-term elevated temperatures up to + 80°C.

APPLICATION:

Product intended for:

filling cavities | strengthening and stiffening surfaces made of metal and plastic repair of rusty places

Unsaturated polyester resin with the addition of catalysts, intended for manual lamination. The product is characterized by high adhesion to the substrate and flexibility, as well as high resistance to water, gasoline, greases and oils.

APPLICATION:

Product intended for:

repair of large rusty parts of a car body repair of caravans, boats, yachts etc. use in construction

PRODUCT FEATURES:





Product code: VSZU nr of pieces in a pack

PRODUCT FEATURES:



flexible



soundproofing



roduct code: VSOKB	1 kg
r of pieces in a pack	12
r of items on a layer	96
r of items on a nallet	576

PRODUCT FEATURES:



waterproof



excellent



Product code: VZR	250 g
nr of pieces in a pack	15
nr of items on a layer	105
nr of items on a pallet	945

PRODUCT FEATURES:



waterproof





Product code: VZNP	1 kg
nr of pieces in a pack	6
nr of items on a layer	72
nr of items on a pallet	648



PROFESSIONAL PRODUCTSBASED ON SYNTHETIC RESIN



The Dragon Pro line includes professional products for bodywork and car painting. Dedicated to the renovation of motor vehicle bodies, including boats and yachts.

EXPOSITION













TEMPLATES

















ORDERING PRODUCTS:

When placing an order, please provide the product code, weight and color (if any):

For example: Rustic white stain



Available Weights:

-	
2 g - 002	175 ml - 175
15 ml - 015	200 ml - 200
2x13 ml - 013	250 ml/250 g - 250
20 ml - 020	300 ml - 300
30 ml/30 g - 030	400 ml/400 g - 400
40 ml - 040	500 ml/500 g - 500
50 ml/50 g - 050	620 g - 620
120 ml - 120	625 g/750 ml - 625

750 ml - 750 800 ml/800 g - 800 1 L /1 kg - 01 1,5 L/1,5 kg - 01_ 2,5 L/2,5 kg - 02_ 3 L/3 kg - 03 5 L/5 kg - 05 6 L/6 kg - 06 9,5 L/9,5 kg - 09_ 10 L/10 kg - 10 12 L/12 kg - 12 15 L/15 kg - 15 19 L/19 kg - 19 20 L/20 kg - 20 25 L/25 kg - 25 50 L/50 kg - 50 57 L/50 kg - 57 200 L/200 kg - 200

Selected products from the SOLVENTS group of 500 ml weight are available: in a glass bottle, a plastic bottle (TW) and a metal can (ME).

For example: a glass bottle - DNS500 | plastic bottle - DNS500 / TW | metal can - DNS500 / ME



Export Department

tel: +48 12 625 75 78 export@dragon.com.pl

Private Label Department

tel: +48 12 625 75 00

privatelabels@dragon.com.pl

Dragon Poland Sp. z o.o.

ul. rtm. Witolda Pileckiego 5, 32-050 Skawina , Poland tel: +48 12 625 75 00, export@dragon.com.pl www. dragon.com.pl













Dragon Poland Sp. z o.o.

rtm. Witolda Pileckiego 5th St. 32-050 Skawina, Poland

mob. + 48 12 625 75 00

e-mail: info@dragon.com.pl

www.dragon.com.pl